
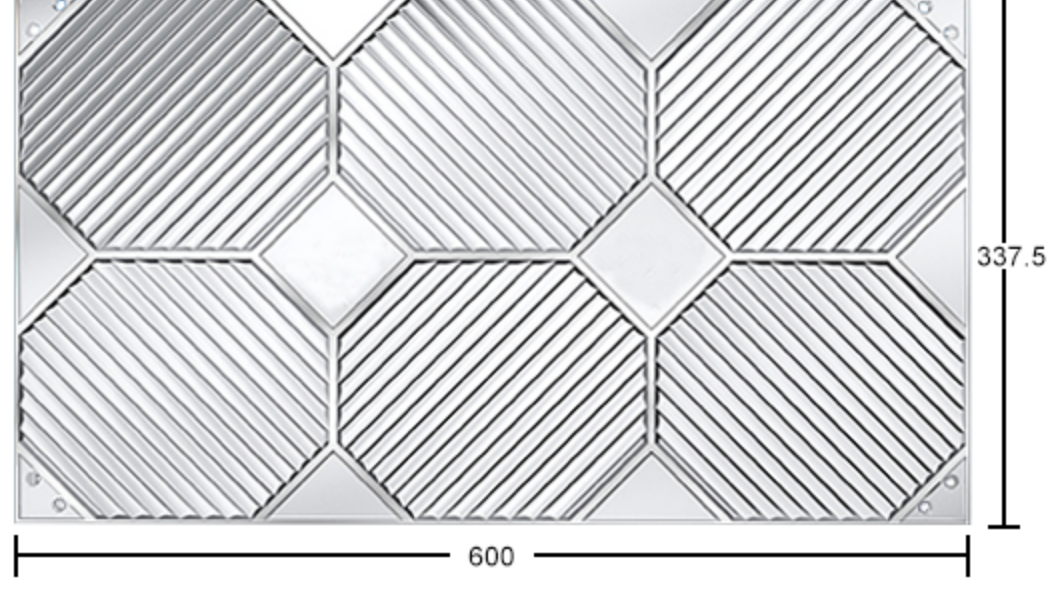


T SERIES

## FI4 T SERIES PRODUCT

THIS COMES TO THINKSTV'S 3RD GENERATION OF T - SERIES, WITH 6.9KG WEIGHT AND SLIM, SMOOTH MAKE.

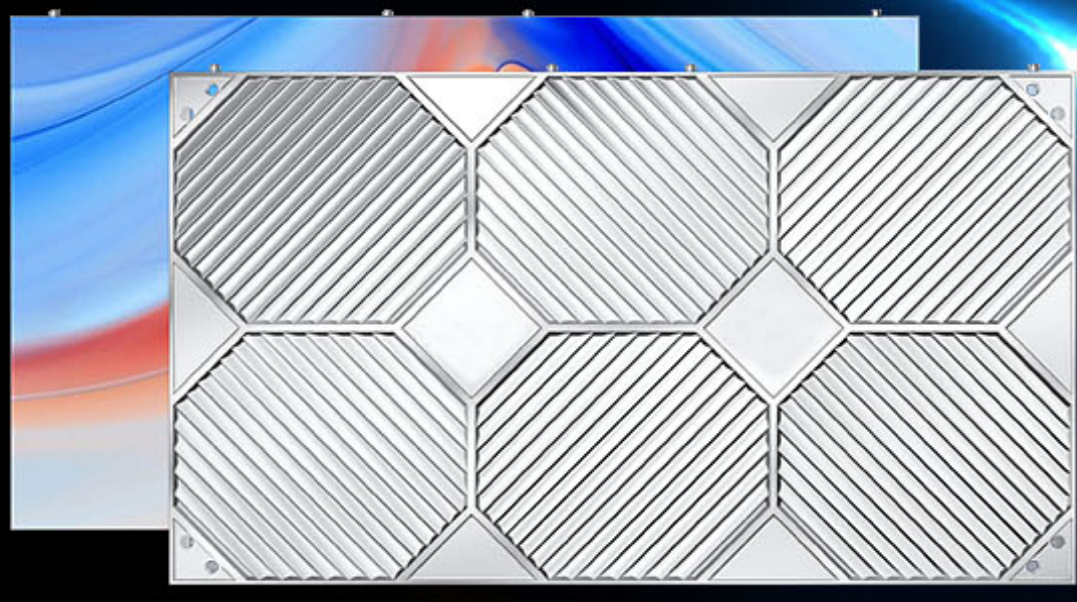


### PRODUCT DIMENSION

- Flash silver and black matte to choose for the cabinet.
- Double power&signal system design to handle any unexpected emergency.
- Memory on board ensuring efforts to switch modules freely and store calibration data.
- 16:9 aspect ratio for easy setting up screen and pixel-to-pixel screen quality.

### INSTALLATION

With four locating pins on top and one ball punger, and handy cabinet locks, all installation will facilitate and be fixed firmly.

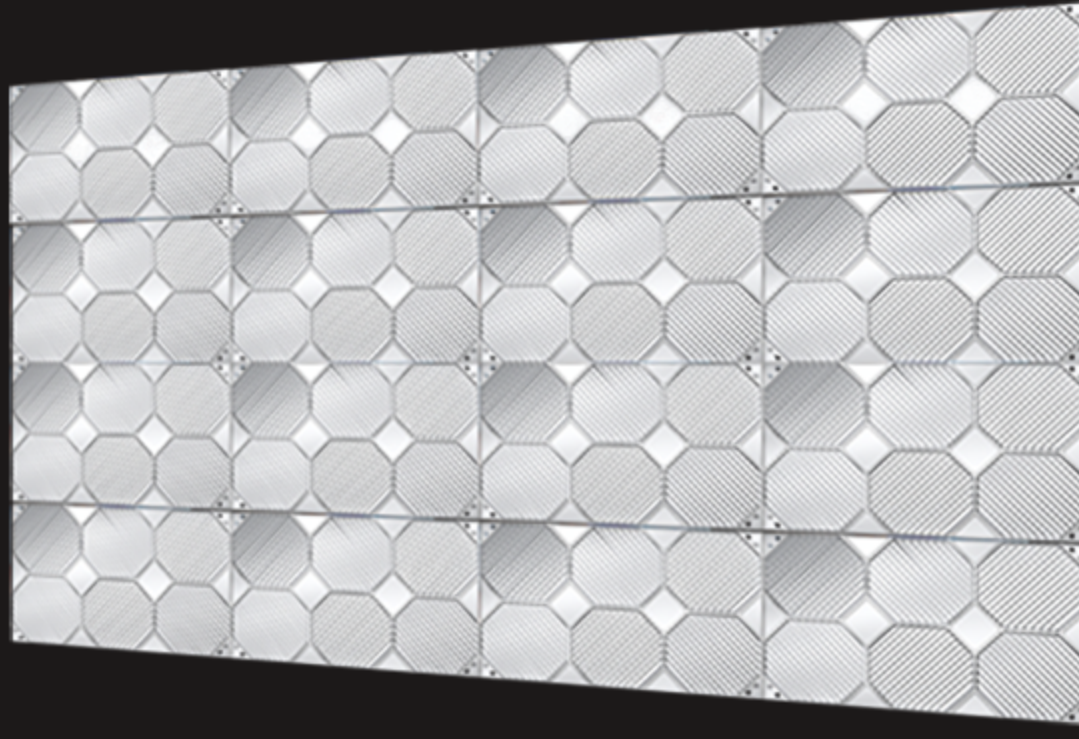

Ordinary display screen


THINKSTV screen

### LOW GRASCALE LEVEL HIGH LUMINANCE

High grayscale levels, high refresh rates, high contrast ratios at low-illuminant brightness.

### DYNAMIC, ENERGY SAVING

Screen detects darkened gradient parts and decides smartly so as to enhance contrast and save energy.

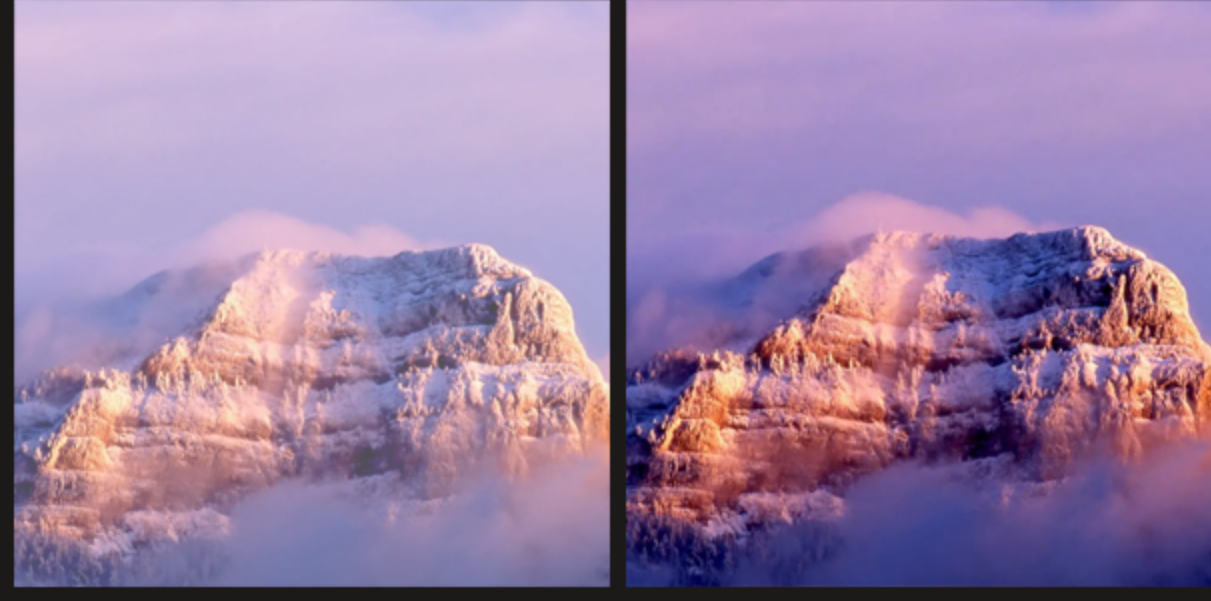


### WIDE VIEWING ANGLES

It gives you better visual exeperience at various angles and positions.

### HIGH DYNAMIC RANGE(HDR)

It supports HDR which ensures the screen brilliant colors and luminance, and best performance for dim quality of media content.

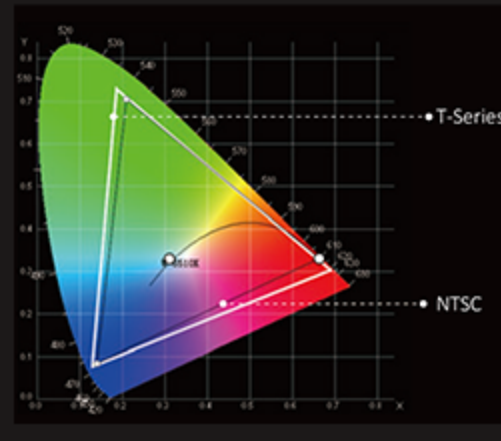

wide gamut



4K

### INSTALLATION METHOD



CONTROL AND COMMAND CENTER



CONFERENCE ROOM

### APPLICATION SCENARIO

### APPLICATION SCENARIO



STUDIO



STADIUM HALL

### PRODUCT SPECIFICATIONS

Item	T0.93	T1.25	T1.56	T1.87
Pixel pitch	0.93mm	1.25mm	1.56mm	1.87mm
Pixel density	1137778	640000	409600	285204
Module size	300x168.75mm			
LED package	MiniLED	SMD1010	SMD1212	SMD1515
Module resolution(pixels)	320x180	240x135	192x108	160x90
Module arrangement per cabinet	2x2			
Cabinet dimension	600x337.5x52mm			
Cabinet weight (including module)	6.9kg			
Cabinet resolution (pixels)	640x360	480x270	384x216	320x180
Maintenance	Full front service			
System backup	Support			
White balance brightness	500-800cd/m <sup>2</sup>			
Pixel-level calibration	Support			
Color temperature	6500K (adjustable)			
Refresh rate	3840Hz			
Viewing angle	160°(V/H)			
Brightness uniformity	≥99%			
Grayscale level	16bits			
Contrast ratio	5000:1			
Scanning mode	1/60	1/60	1/64	1/45
Working voltage (input)	110-240V, 50/60Hz			
Max./Avg. Power consumption	500W/m <sup>2</sup> /165-260W/m <sup>2</sup>			
Storage temperature&humidity (RH)	-20°C-50°C&35-75%			
Working temperature&humidity (RH)	-20°C-50°C&35-75%			
IP ratings	IP45			
Screen temperature rise	≤5°C			
Installation	On-wall/recessed/pedestal/suspended/stacked install			
Signal output	HDMI/VGA/DVI/DP			
Certification	RoHS/FCC/CE			