




SHENZHEN KMTEKLED PHOTOELECTRICITY CO. , LTD

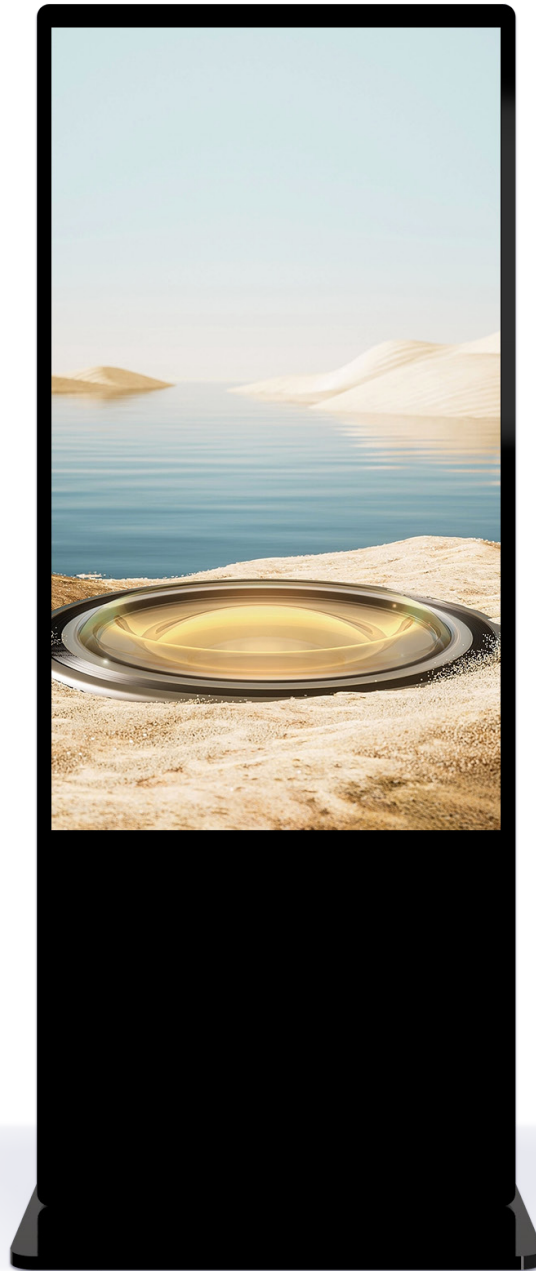

**LCD DIGITAL SIGNAGE**

**43"/49"/55"/65"**



## Product Advantages


### Ultra clear and bright display

Ultra HD resolution combined with anti-glare glass can present extremely delicate images,so that users feel richer details

 HD 4K resolution 3840\*2160


### Ultra-thin design

Advanced technology and materials are used to make the body thin to an amazing degree.Its light and thin design not only makes its appearance more fashionable and simple, but also saves space

 Increase the attraction and occupy less space

### High quality aluminum alloy frame

The outer frame is made of high quality aluminum alloy and oxidized, and the rear shell is made of high temperature powder spraying, which is wear-resistant, corrosion-resistant and collision-proof

 It has oxidation resistance, corrosion resistance and wear resistance


### Fully tempered glass

It has high hardness and impact resistance, making the conference plate more durable and able to resist some daily collisions and scratches.The surface also has a fingerprint protection coating,effectively reducing the residue of fingerprints and grease

 Glass hardness Mohs 7 Grade, safety is guaranteed


### Multifunctional integration

In addition to advertising display, it can also have the functions of information inquiry and navigation guidance,providing more scene application services

 Multimedia interaction, centralized management system

### Customized services

According to customer needs, we provide personalized appearance design, software customization and other services to meet the use requirements of different scenarios

 Rich experience of professional team

## Application scenarios

It is used in large supermarkets, shopping malls, hotels, airports, stations, hospitals, libraries, restaurants, cinemas and so on

# Product Parameter

Product size	43"	49"	55"	65"
LCD				
Resolution	1920*1080/3840*2160			
Color	16.7M			
Brightness	≥300cd/m <sup>2</sup>			
Contrast ratio	1200:1			
Response time	8ms			
View angle	178° (H) /178° (V)			
Display area	940.896 (H) x 529.254 (V)mm	1073.89 (H) x 604 (V)mm	1209.6 (H) x 680.4 (V)mm	1428.48 (H) x 803.52 (V)mm
Backlight type	LED			
Power Supply				
Power requirements	AC 110–240V, 50/60HZ			
Standby power	≤ 1 W			
Power consumption	≤ 80W	≤ 100W	≤ 120W	≤ 180W
Android Board				
CPU	Quad–core Cortex–A55 with a maximum frequency of 1.9G (optional)			
GPU	Mail–G31 Quad–core GPU			
Memory	DDR3 2G+16G			
Operating system	Android 11.0			
Other features	Equipped with RJ45, supports Ethernet, Wi–Fi 802.11b/g/n protocols, built–in speaker, and RS–232 communication protocol.			
Supported Formats				
Video	H.264, VP8, MAV, WMV, AVS, H.263, MPEG4 etc			
Audio	MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP			
Product Size				
Complete machine	1800*598.8*30.6mm	1856.5*684*30.6mm	1914.7*748.2*30.6mm	2065*894.6*66.2mm
Packing box	1845*710*160mm	1900*805*160mm	1968*860*160mm	2080*995*175mm
Packaging Materials				
Carton	Double ripple			
Wooden case	Wooden frame (optional)			


Product Size	43"	49"	55"	65"
Physical Properties				
Net weight	33.8 KG	41.6 KG	46.6 KG	76 KG
Gross weight	39.3 KG	48.2 KG	53.9 KG	77.9 KG
Working humidity	20%–80%RH			
Working temperature	0℃—45℃			
Storage temperature	–20℃—60℃			
Storage humidity	10%–75%RH			
Installation method	Floor–standing			

# Product renderings

Ordinary/capacitive vertical advertising machine :



Infrared vertical advertising machine:

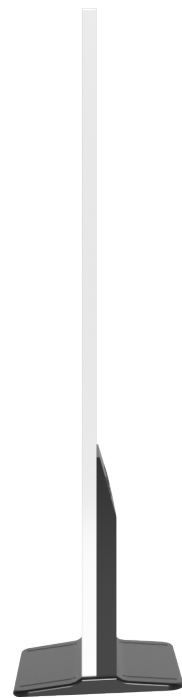



# Application

Diverse scenes: Pedestrian street, Bulletin board, Station advertising, school



Web: [www.kmtekled.com](http://www.kmtekled.com)

Mail: [info@kmtekled.com](mailto:info@kmtekled.com) [sales@kmtekled.com](mailto:sales@kmtekled.com)

Tel: 0086-755-27648736

Fax: 0086-755-27648736

Address: 4th Building, The 2nd industry Park Of Nangang, Songbai Rd 1026, Xili, Nanshan, Shenzhen, China - Postcode: 518055

