



FA4 Series

Small Pixel Pitch HD LED Display Screen

**KMT1.25、 KMT1.538、 KMT1.667、
KMT1.86、 KMT2、 KMT2.5**

640*480mm
/640*640mm
/960*480mm



FA4 Series

**KMT1.25、KMT1.538、KMT1.667
、KMT1.86、KMT2、KMT2.5**


1. Split Joint Without Gap,
2. Ultra High Definition and Wide Visual
3. Anti-Blue Light, Anti-Visual Fatigue
5. High Refreshing, High Contrast Ratio
6. Front Maintenance

SHENZHEN KMTEKLED PHOTOELECTRICITY CO., LIMITED



Perfect to split joint without gap, it can be jointed as various of sizes or shapes.



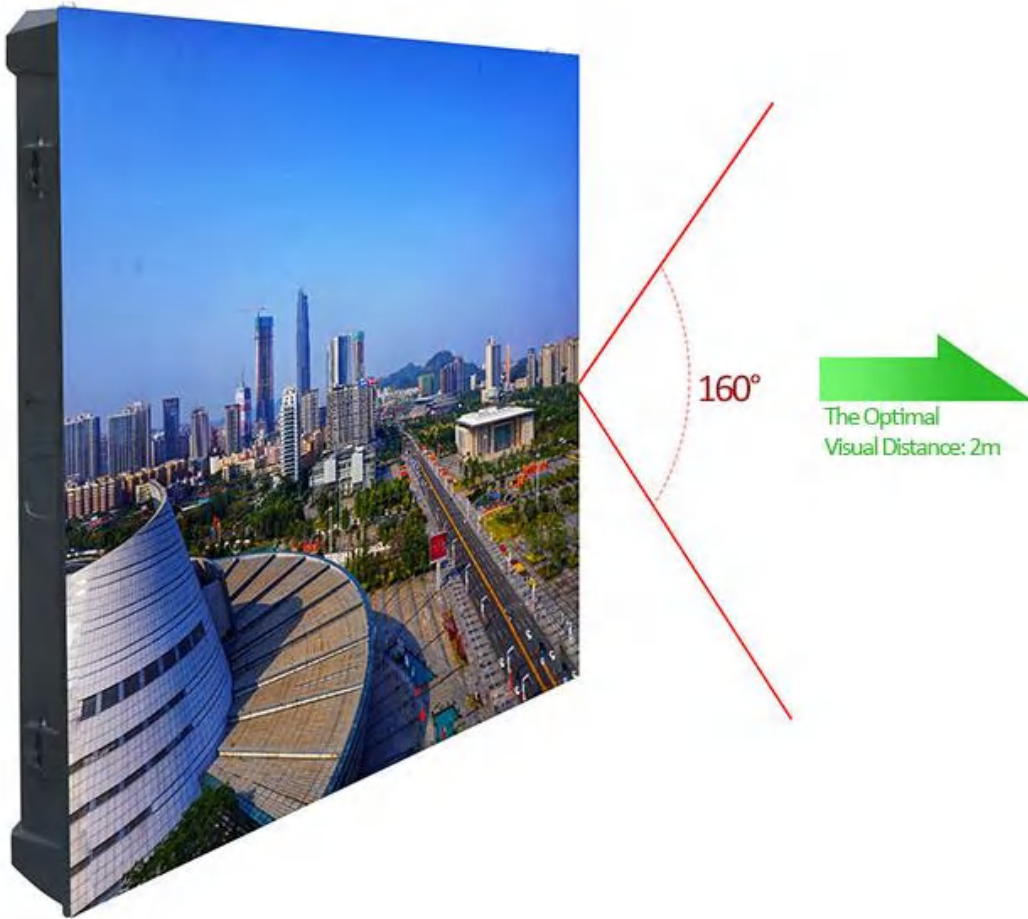

160° Ultra-Wide Visual Angle,
to view without blind angle
and color cast, 4K HD picture
quality, to enjoy a visual feast.



It can realize splicing
of various sizes such as
640x480mm,
640x640mm,
960x480mm,
320x640mm.



High Refreshing Rate




Low Refreshing Rate

VS



Gray Transition is Smooth

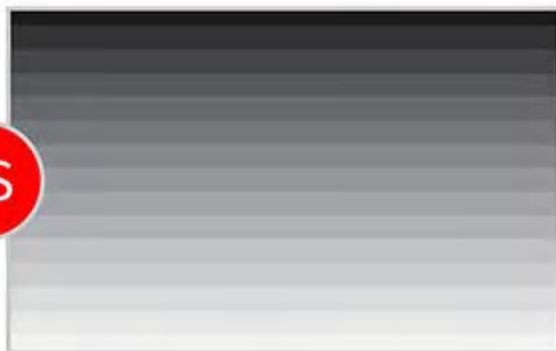


Gray Transition is not Smooth

VS



No Ghost Phenomenon

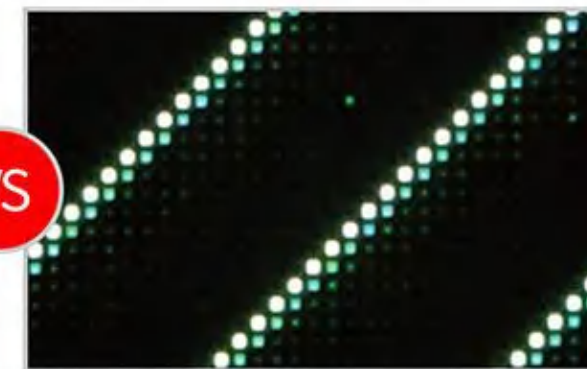

Picture is Overlying and Delay

VS

Low brightness, high grayscale and refreshing, the picture is stable by dynamic display, no corrugated



Front maintenance and installation, no need maintenance space, convenient and fast, reinforcing cover, to make it be flat.

3 Steps to realize front maintenance



Magnetic Equipment



Be Direct to Display Module



Take off module

Items			Technical Parameters			
Item No.:	KMT1.25	KMT1.538	KMT1.667	KMT1.86	KMT2	KMT2.5
Pixel Pitch	1.25mm	1.538mm	1.667mm	1.86mm	2mm	2.5mm
Cabinet Size	640*480mm(Or 640*640mm Or 960*480mm)	640*480mm(Or 640*640mm Or 960*480mm)	640*480mm(Or 640*640mm Or 960*480mm)	640*480mm(Or 640*640mm Or 960*480mm)	640*480mm(Or 640*640mm Or 960*480mm)	640*480mm(Or 640*640mm Or 960*480mm)
Product Weight	5.5KG(640*480mm)	5.5KG(640*480mm)	5.5KG(640*480mm)	5.5KG(640*480mm)	5.5KG(640*480mm)	5.5KG(640*480mm)
Brightness	≥500cd/m²	≥600cd/m²	≥600cd/m²	≥600cd/m²	≥600cd/m²	≥600cd/m²
Visual Angle	160° /160° (Horizontal/Vertical)	160° /160° (Horizontal/Vertical)	160° /160° (Horizontal/Vertical)	160° /160° (Horizontal/Vertical)	160° /160° (Horizontal/Vertical)	160° /160° (Horizontal/Vertical)
The Optimal Visual Distance	≥1m	≥1.5m	≥1.6m	≥1.86m	≥2m	≥2.5m
Grayscale	It is available within 65536 grade	It is available within 65536 grade	It is available within 65536 grade	It is available within 65536 grade	It is available within 65536 grade	It is available within 65536 grade
Refreshing Ratio	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
Module Qty/m²	19.5	19.5	19.5	19.5	19.5	19.5
Continue working time	>24 (Hrs)	>24 (Hrs)	>24 (Hrs)	>24 (Hrs)	>24 (Hrs)	>24 (Hrs)
Lifespan	>100,000 (Hrs)	>100,000 (Hrs)	>100,000 (Hrs)	>100,000 (Hrs)	>100,000 (Hrs)	>100,000 (Hrs)
The Max Power Consumption	560W/m²	560W/m²	560W/m²	560W/m²	560W/m²	560W/m²
The Average Power Consumption	180W/m²	180W/m²	180W/m²	180W/m²	180W/m²	180W/m²
Protection Grade	IP20	IP20	IP20	IP20	IP20	IP20

SHENZHEN KMTEKLED PHOTOELECTRICITY CO., LIMITED




Application Fields:

It is mainly used for store, conference, studio, airport, exhibition hall, monitoring center, and other indoor areas.



P1.86 Shoes/Glasses Shop Shelf Screen Application Case

Support 100% Customize for Chain Shop Shelf Displays
– Make Retail Product Waving the Tide...

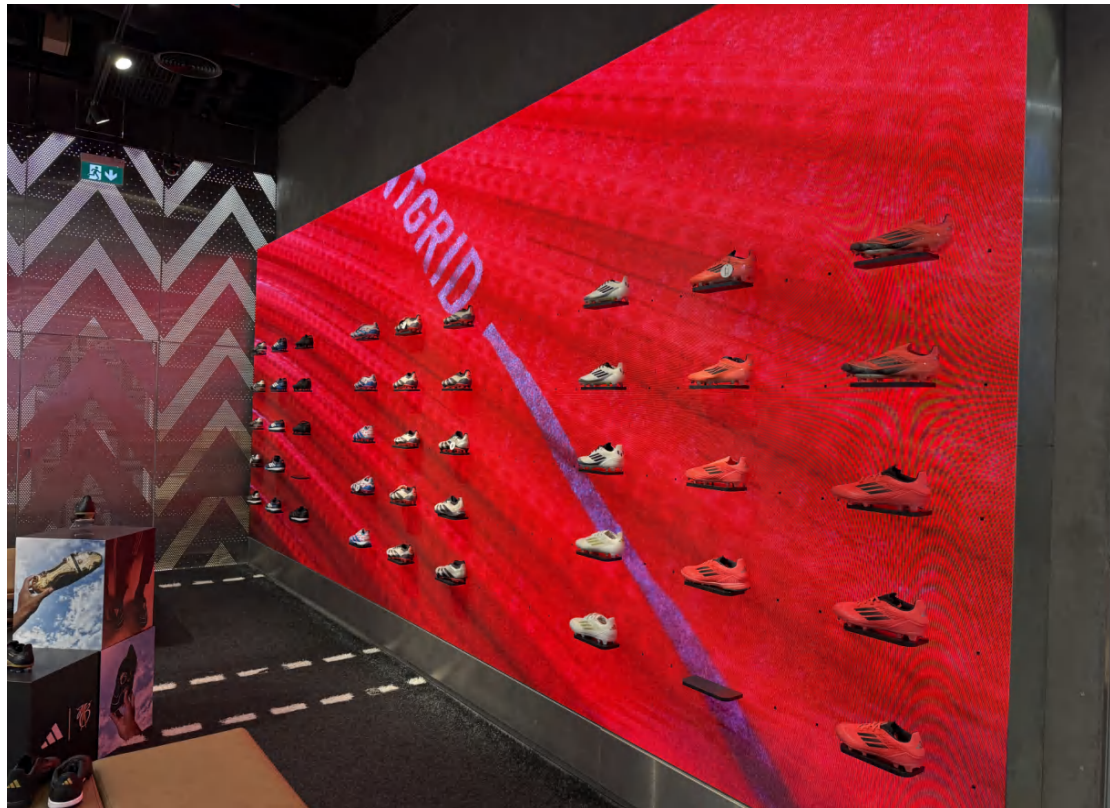

P1.86 Shoes/Glasses Shop Shelf Screen Application Case



SHENZHEN KMTEKLED PHOTOELECTRICITY CO., LIMITED



Web: www.kmtekled.com

Mail: info@kmtekled.com sales@kmtekled.com

Tel: 0086-755-27648736

Fax: 0086-755-27648736

Address: 4th Building, The 2nd inudstry Park Of
Nangang. Songbai Rd 1026, Xili,
Nanshan, Shenzhen, China - Postcode:518055

