T500/1000 Series

P2.6 P2.9 P3.91 P4.81
Dual service frontal rear Rental LED display

Ultra-lightweight and space saving with a number of core technologles
Innovative structural design.Seamless Display and visual Effects.

- IP65 Protection
- Thin Cabinet
- Fast-assembly
- High Refresh Rate
- High Contrast
- Front/Rear Service
- Gray Scale 16bit
- Wide Viewing Angle

T500/1000 series

rental LED Dispaly

T500/1000 series rental LED Dispaly new dsign incorporates many aesthetic elements,adopts high strength die-casting aluminum. better performance with high definition visual display

T500 only 7.5kg per cabinet

T1000 only 12kg per cabinet

Perfect Structure

Has the domestic top design team,the design innovation has its own unique philosophy,with a number of core technologies.Innovative structural design.avant-garde body lines.give you extraordinary experience

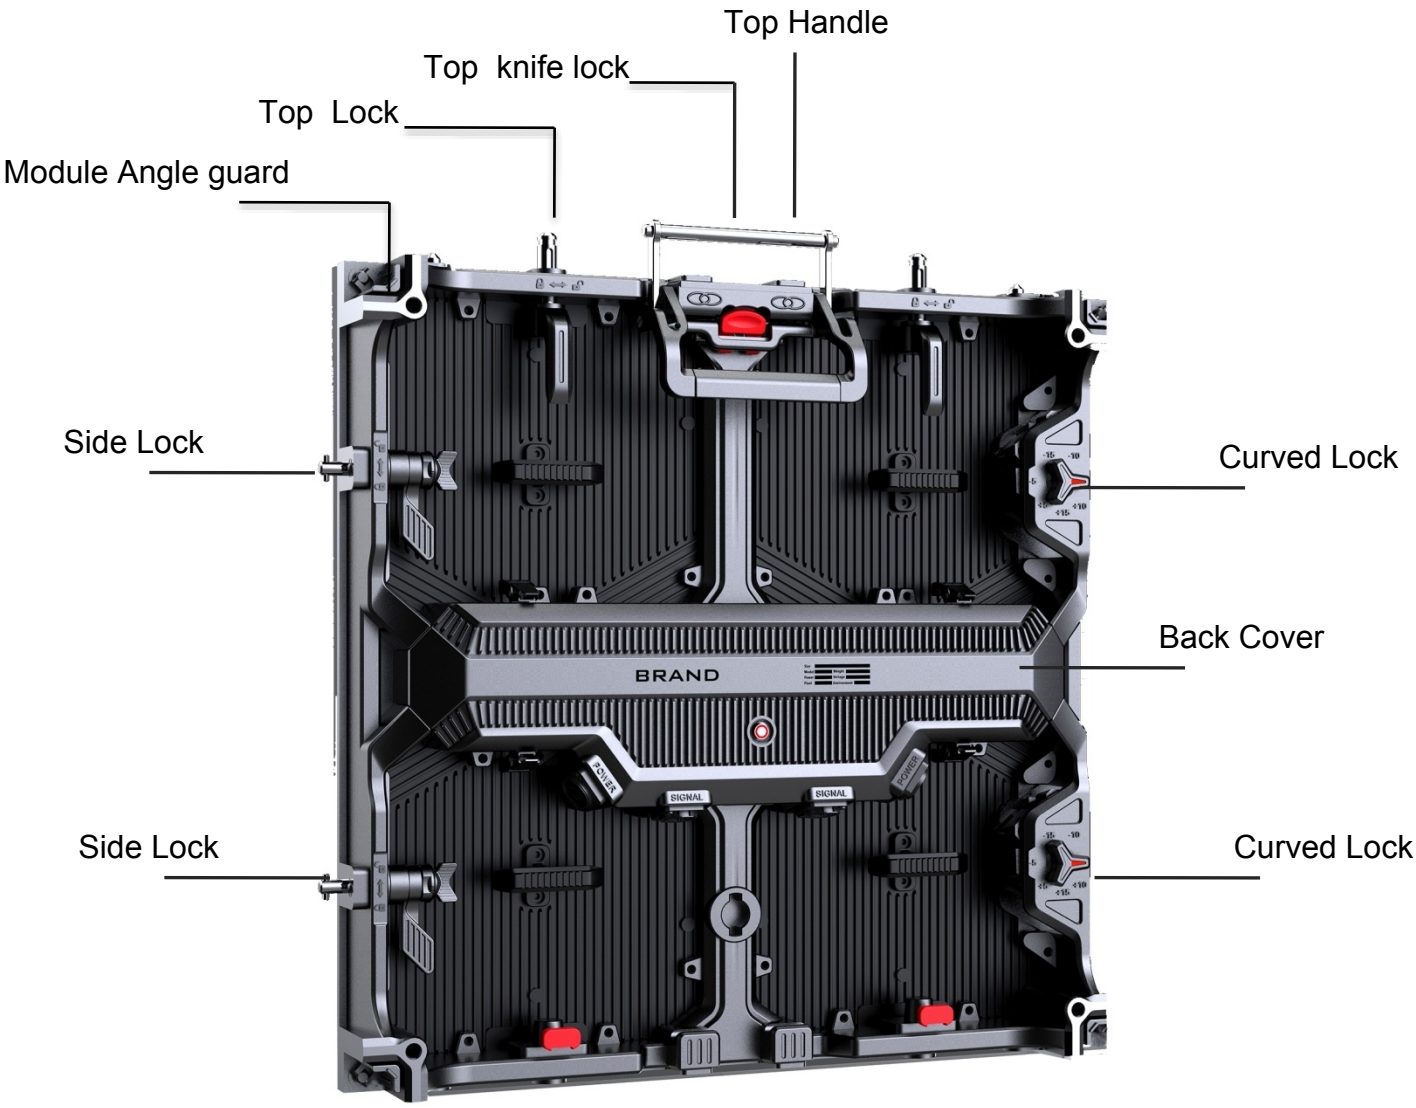

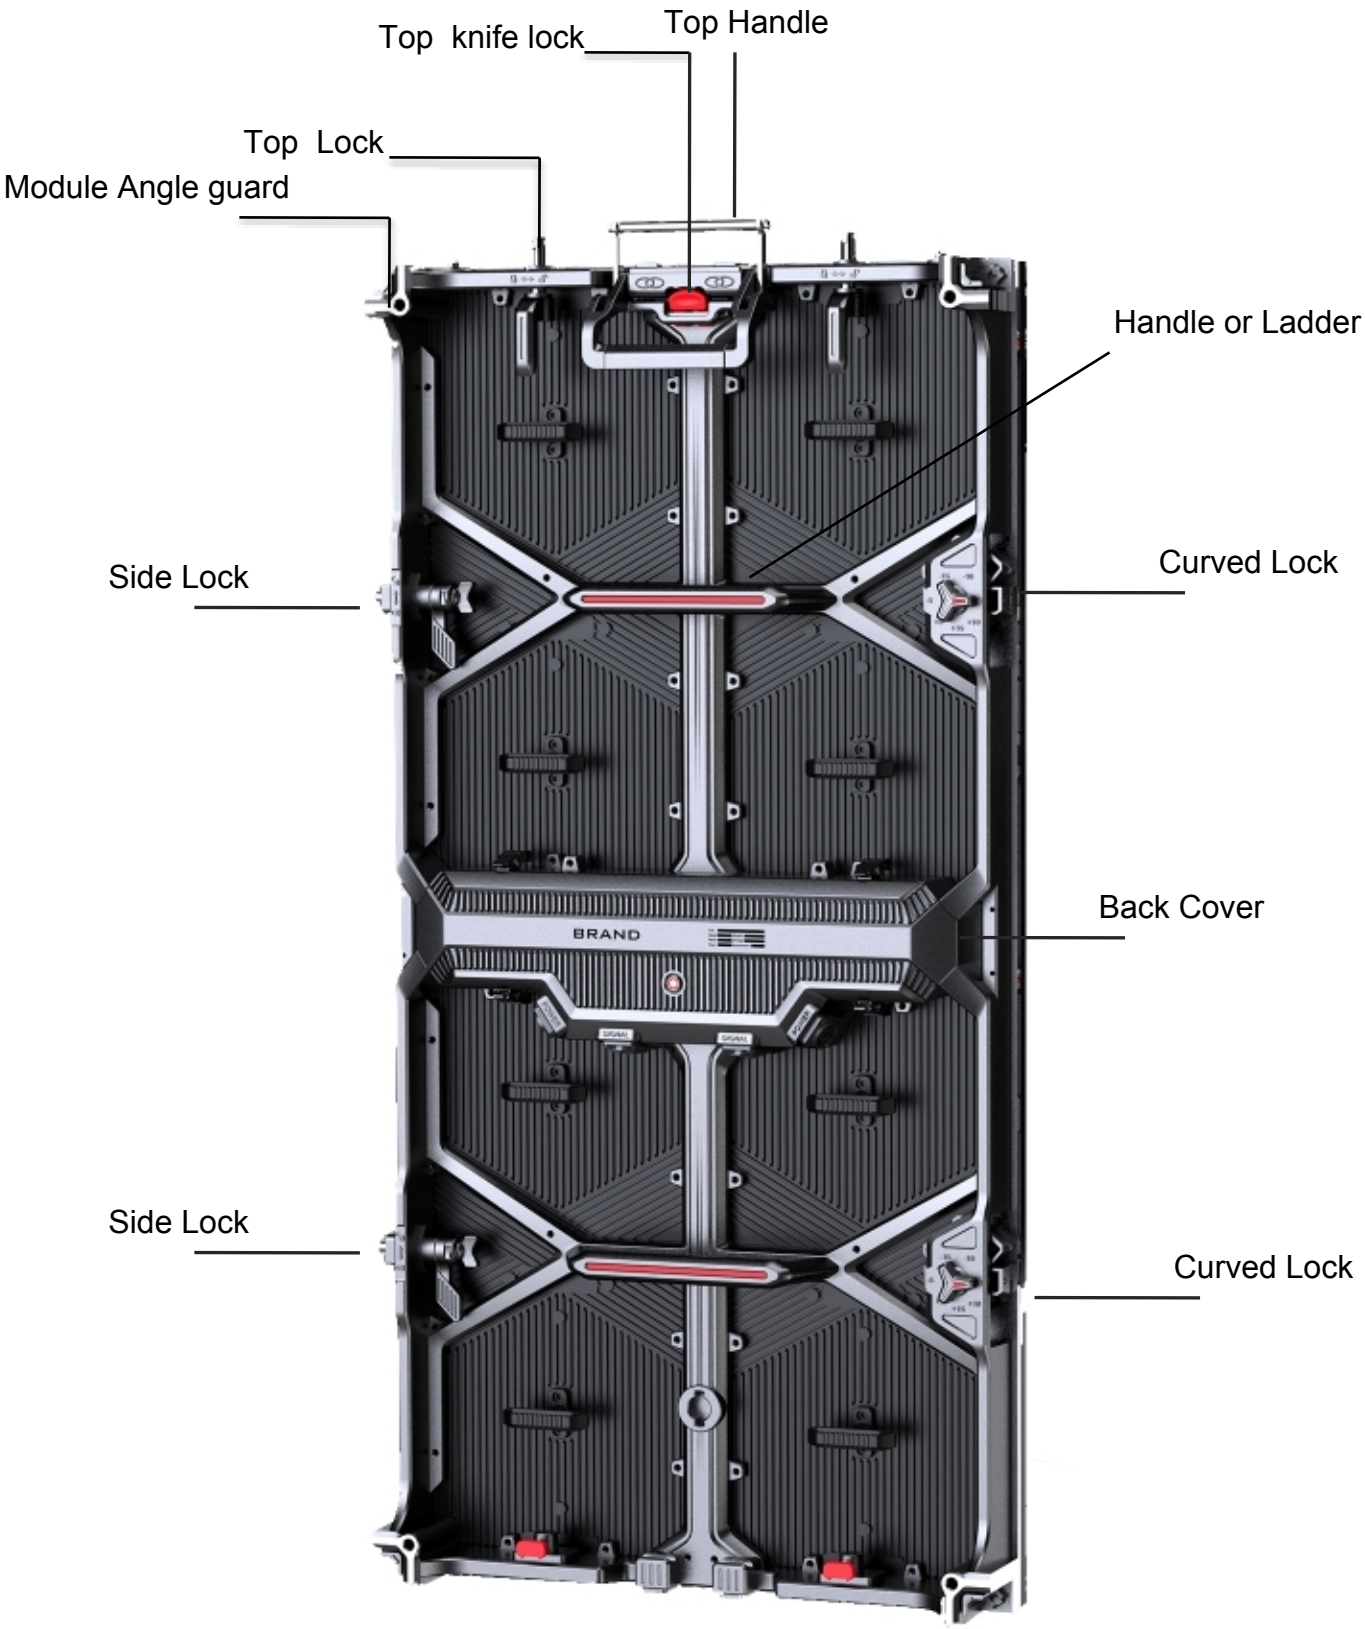
Top knife lock
Top Handle
Top Lock
Module Angle guard
Handle or Ladder
Side Lock
Curved Lock
Back Cover
Side Lock
Curved Lock
BRAND

Module corner protection

Corner protection,transport bump prevention,easy to ues

Design of climbing ladder

It can be maintained or installed by climbing ladders on the cabinet

Detachable Back Cover

Adopts Optimized Control Box with Quick removable without any tools optional the back box(includes power sully and control cards) is removable quickly for replacement and maintain

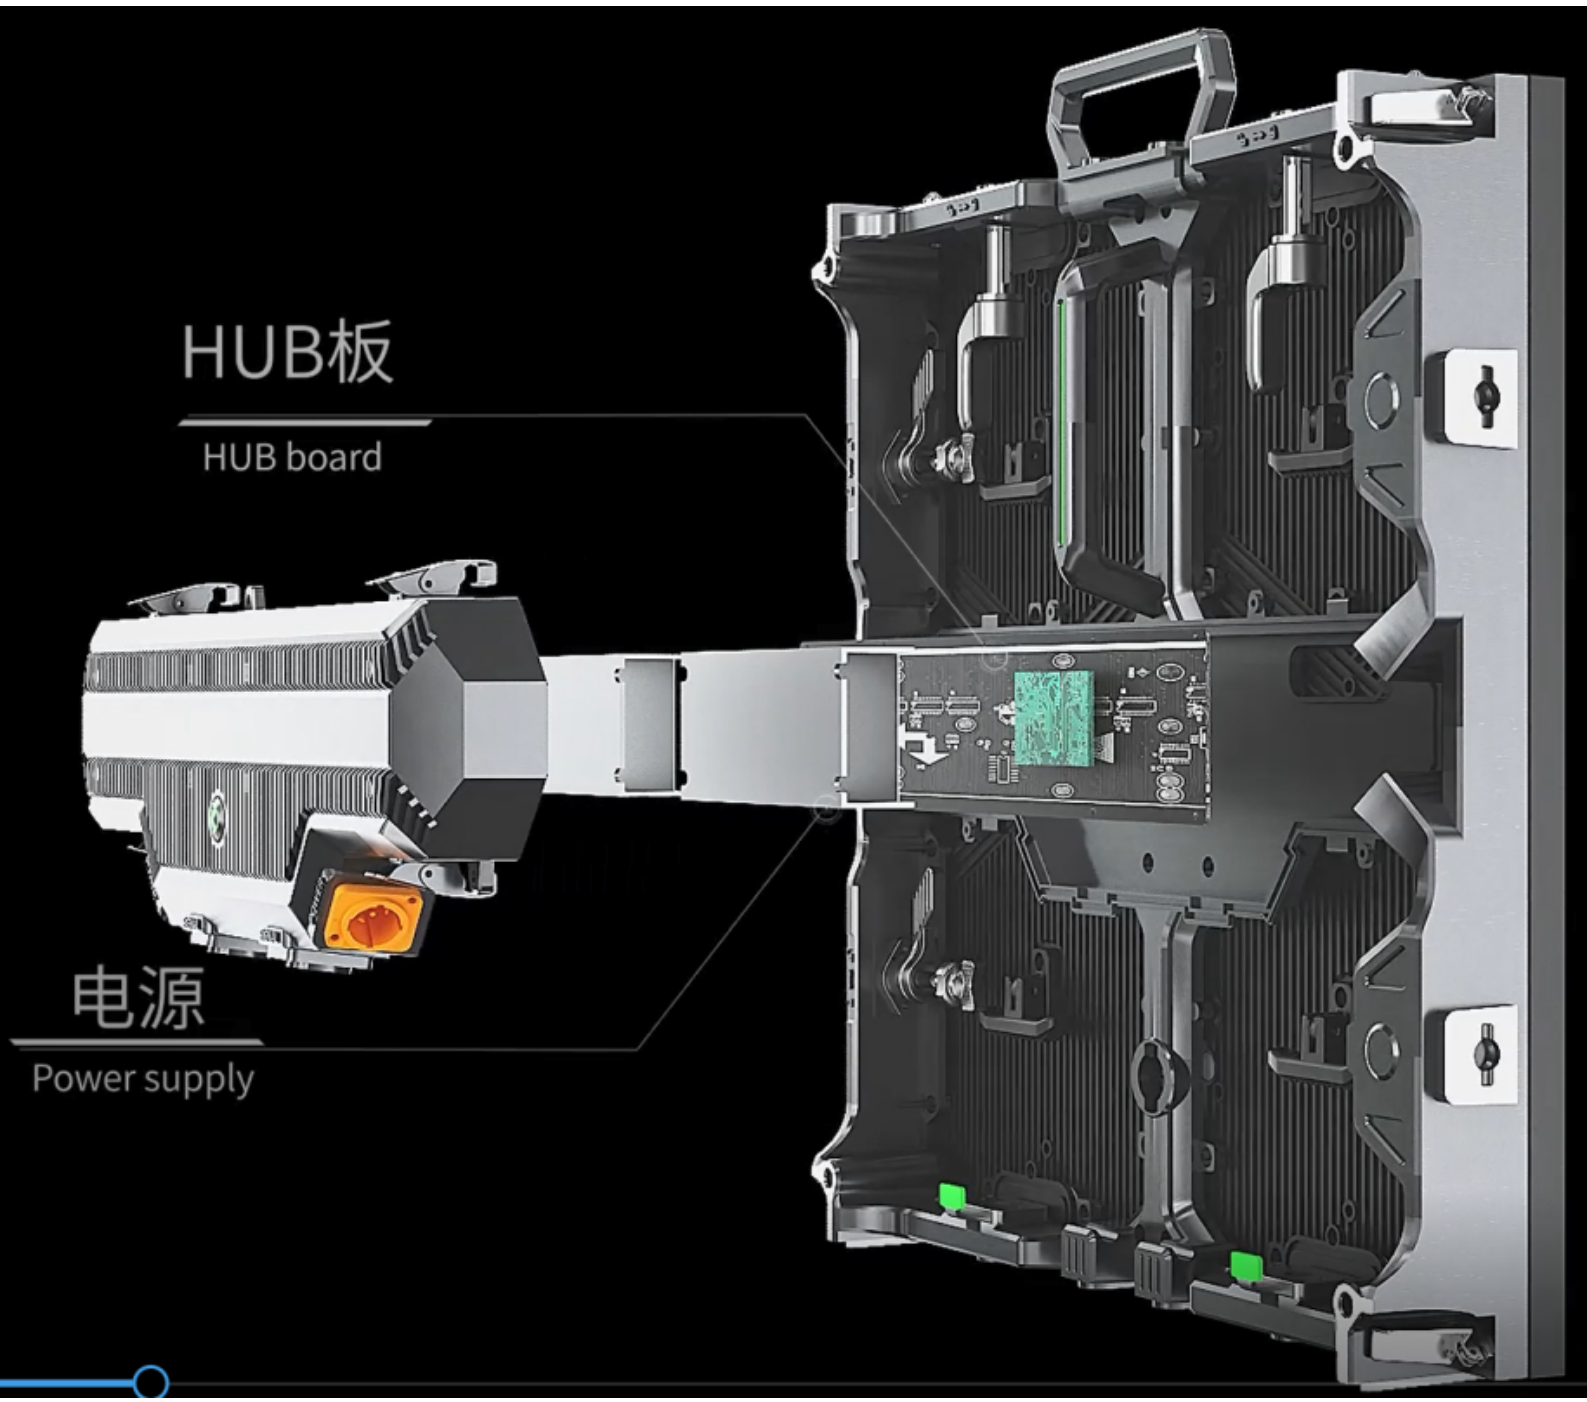

Front &Real Maintenance

T500/1000 Series Rental LED Display is dual maintenance product.not only 100% front accessable but also can do rear service .The LED panels are magnetic and can be removed by tools from front side in 5 seconds.easy and convient,save you cost and labor

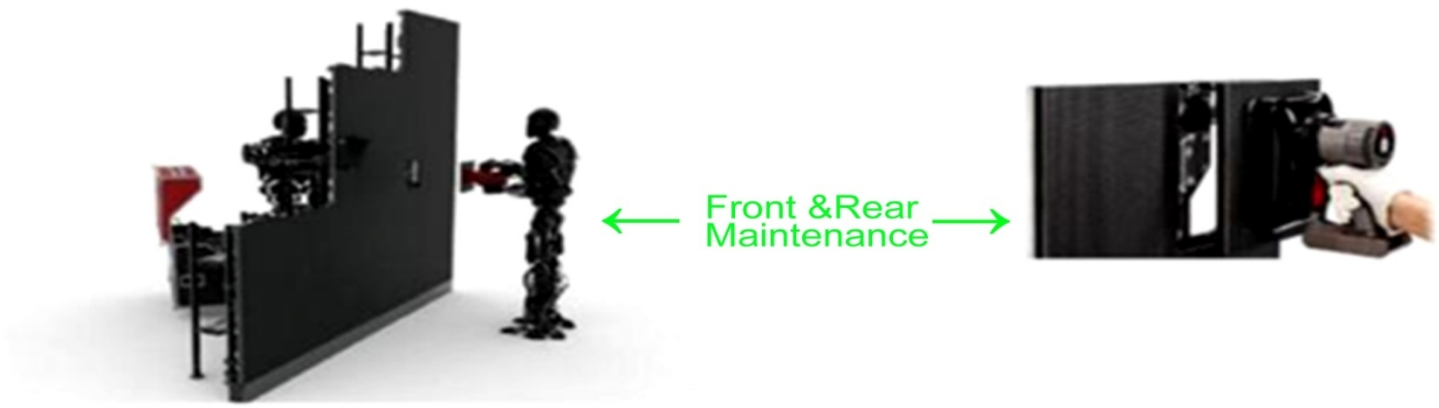

Curved Installation

In order to meet the various aspects of the LEDscreen field.T500/1000 series led display design for Curved with every 2.5° between -10°and 10°,which can make convex and concave

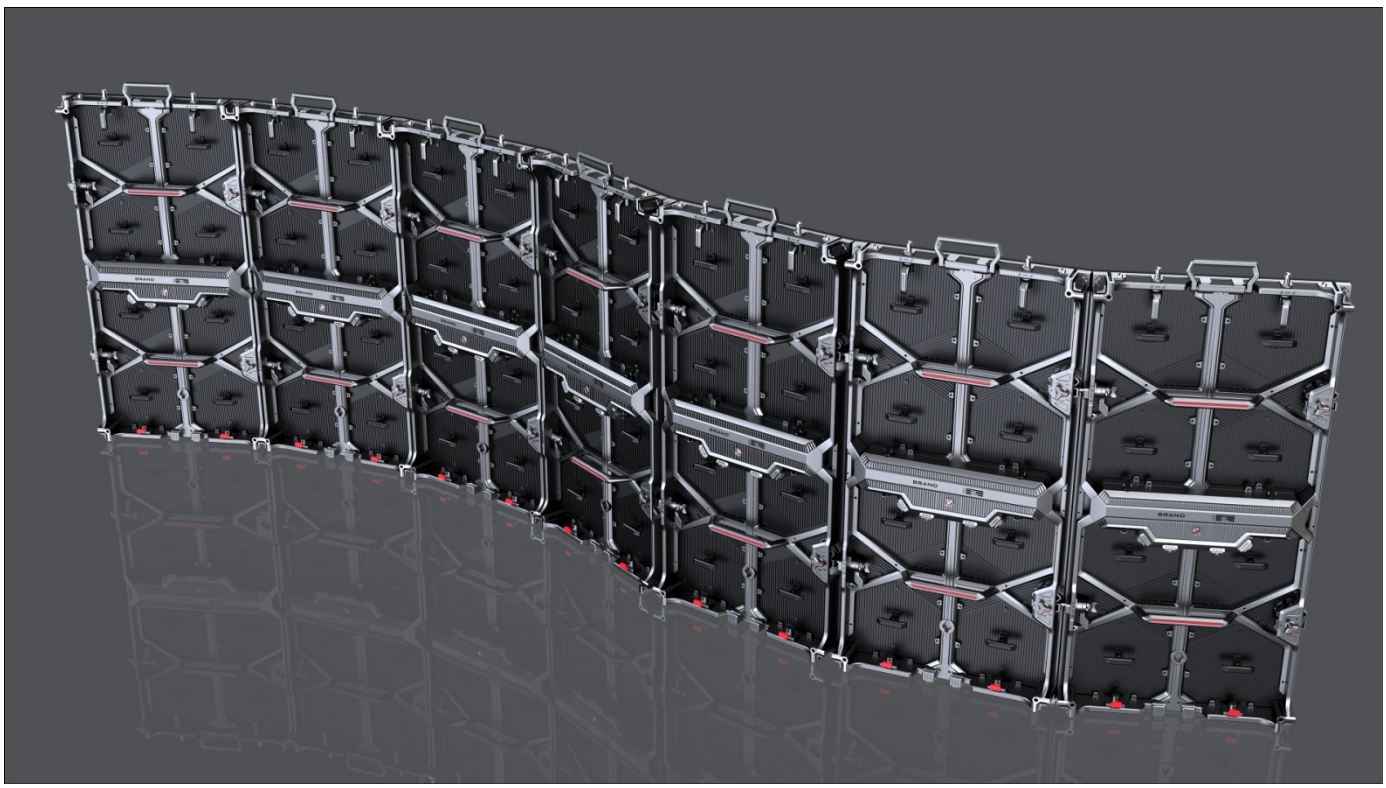

Multi Installation Way of Cabinet

Support 3 installation ways of cabinet with hanging installation, concave& convex installation, stack installation.

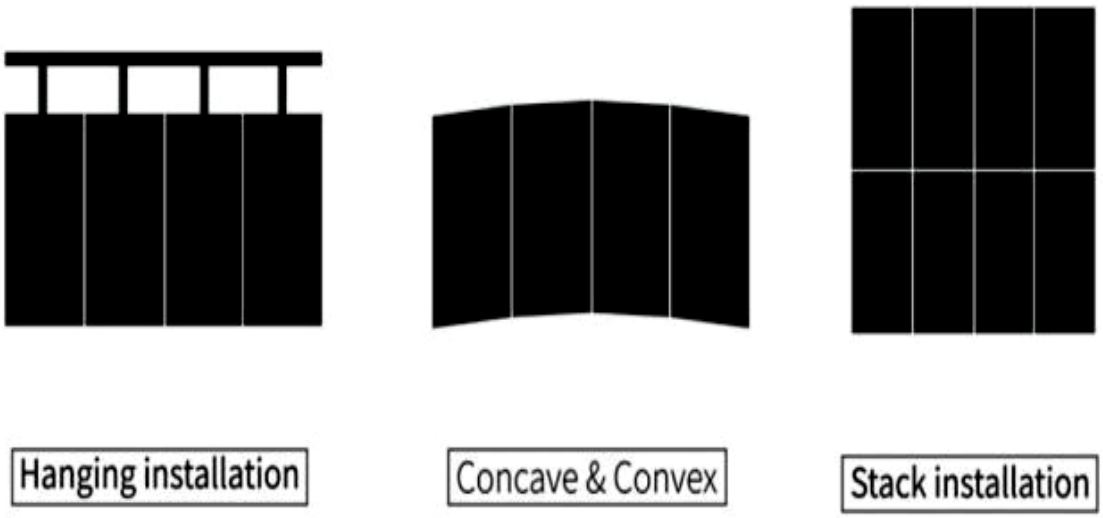

Products

P2.604

96*192 dots/module
250*500mm Panel
500*500mm
500*1000mm
Indoor&Outdoor Display

P2.976

84*168 dots/module
250*500mm Panel
500*500mm
500*1000mm
Indoor&Outdoor Display

P3.91

64*128 dots/module
250*500mm Panel
500*500mm
500*1000mm
Indoor&Outdoor Display

P4.81

52*104 dots/module
250*500mm Panel
500*500mm
500*1000mm
Indoor&Outdoor Display

Pixel pitch	2.604mm	2.976mm	3.91mm	4.81mm
Pixels per cabinet	192*192(H*V) 192*384(H*V)	168*168(H*V) 168*336(H*V)	128*128(H*V) 128*256(H*V)	104*104(H*V) 104*208(H*V)
LED lifetime	100,000(Video-50% brightness)			
Brightness	≥1000nits			
Module size	250*500mm			
module resolution	96*96dots	84*84dots	64*64dots	52*52dots
Refresh rate	1920～3840Hz			
Hor.viwing angle	160°+/-5°(@50% brightness)			
Ver.Viewing angle	140°+/-5°(@50% brightness)			
Brightness uniformity	＞98%			
Dimming	0-100%			
Grey Level	14bits			
Avg Power consumption	350w/m^2	320w/m^2	300w/m^2	280w/m^2
Max power consumption	680w/m^2	640w/m^2	620w/m^2	600w/m^2
Operation power voltage	100-240v/50-60Hz			
Operation temperature	-10°C to +40°C/14°F to 104°F			
Operational humidity	10-80%			
IP rating	IP54 For indoor,IP65 For Outdoor			
Dimensions	500*500*85mm 500*1000*85mm			
Weight/Tile	12kg/27.55lbs			
Serviceability	Front and back service			
Certifications	CE,UL,FCC ClassA,RoHS			