

Die-casting magnesium alloy cabinet

500*500Y/500*1000Y

IR & OR Y2 Series



Fast heat dissipation



Ultra-thin and light weight



High strength

Easy installation




High precision

Easy maintenance




Cabinet appearance


safety protection design high reliability and Long service life

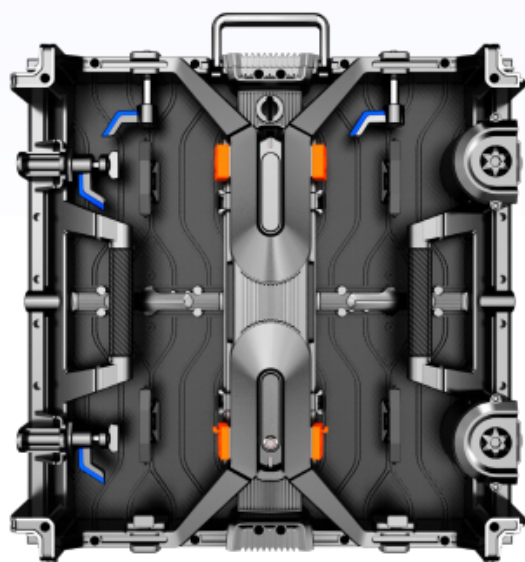


500*500Y Flat

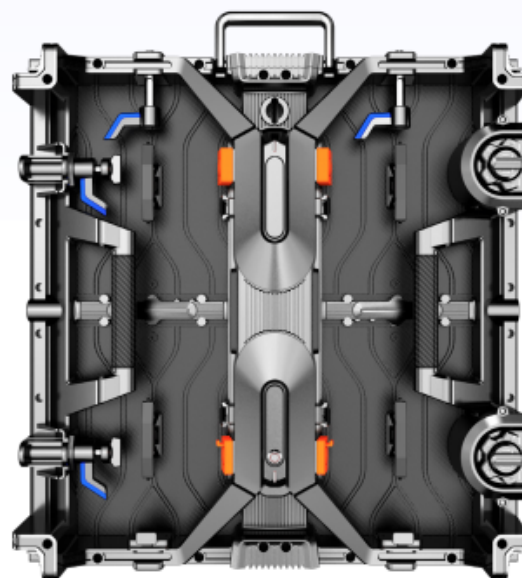

500*500Y Curved

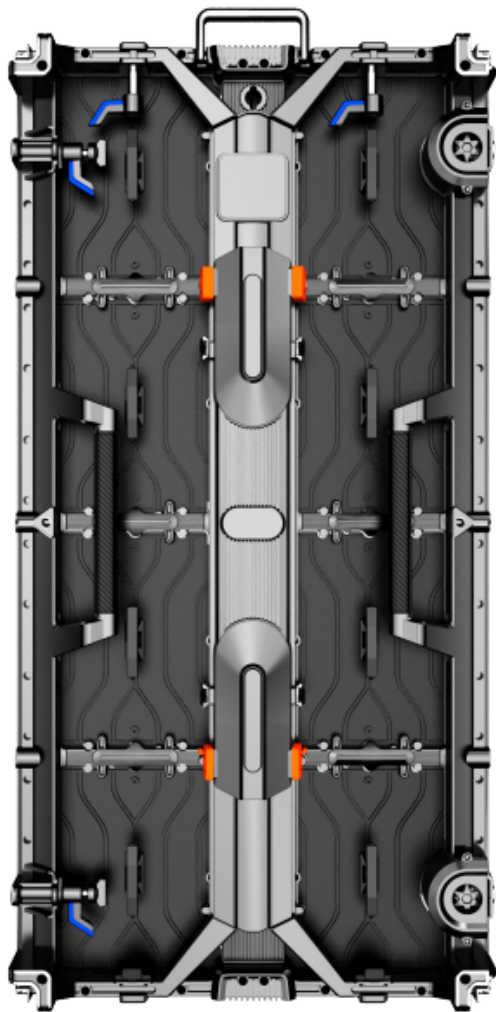


500x1000Y Flat

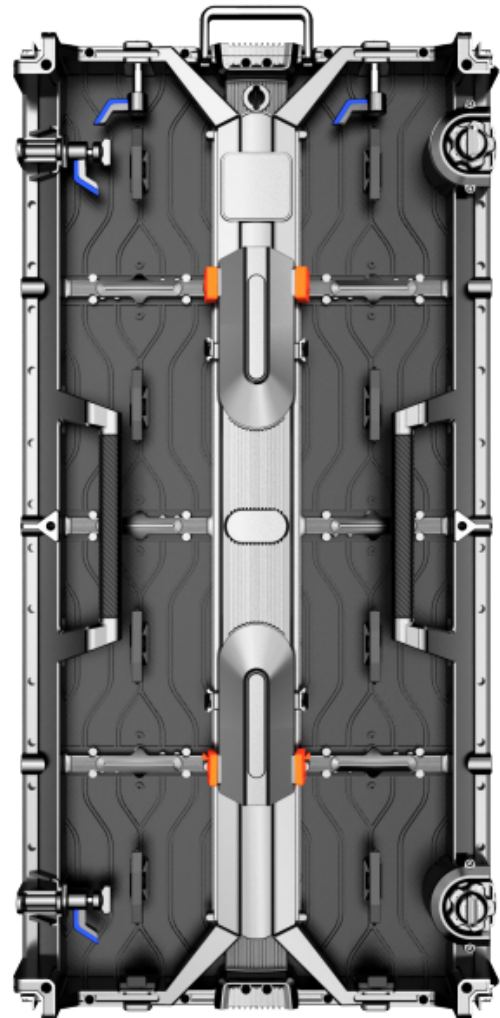

500x5000Y Curved

Support for front and back maintenance power box use HUB design



Double maintenance, simple operation, fast maintenance,
truly save worry and effort for customers

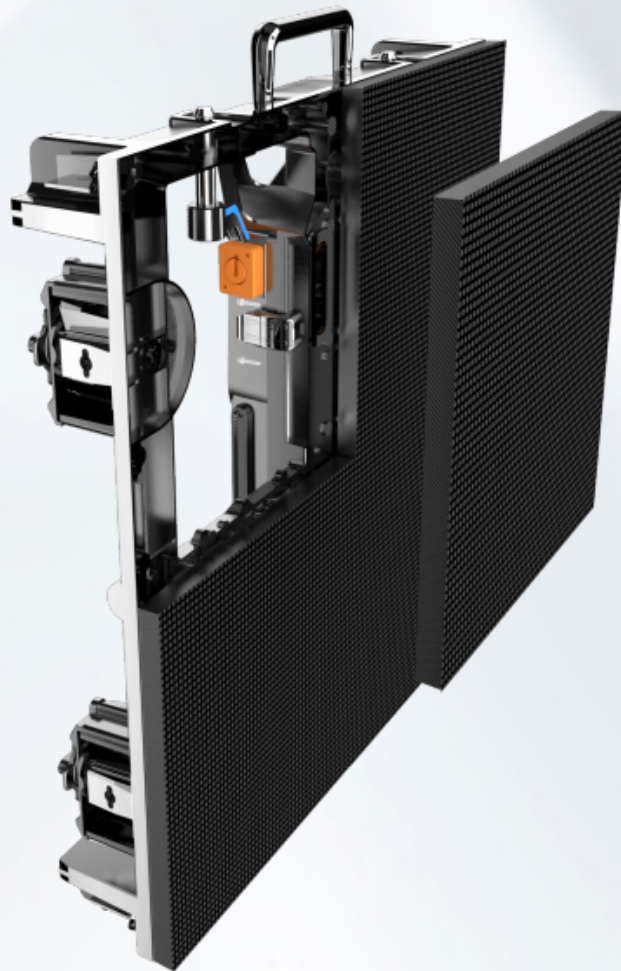

Modeling display


It can be customized to splice any cabinets

Inner arc Outer arc or Curved screens can be spliced at will

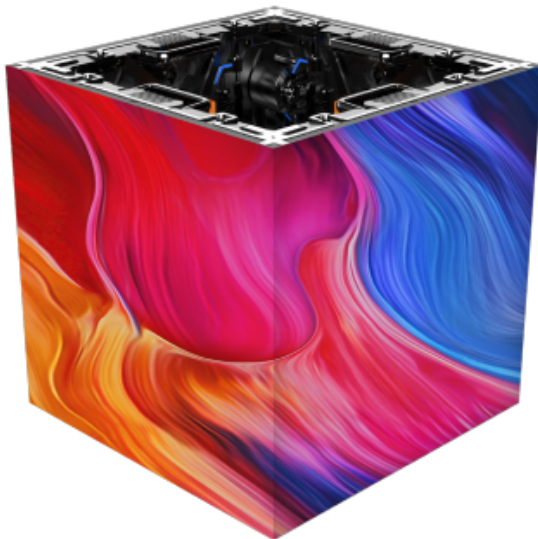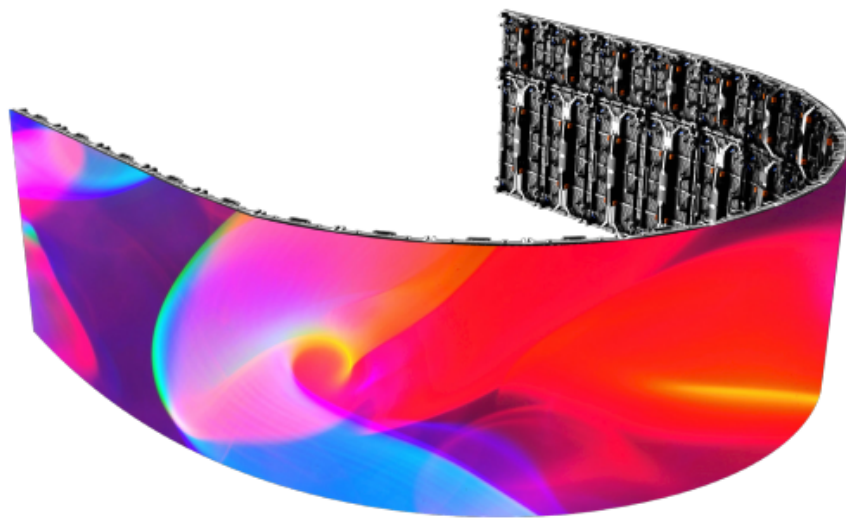

U-shaped assembly


Magic Cube Screen

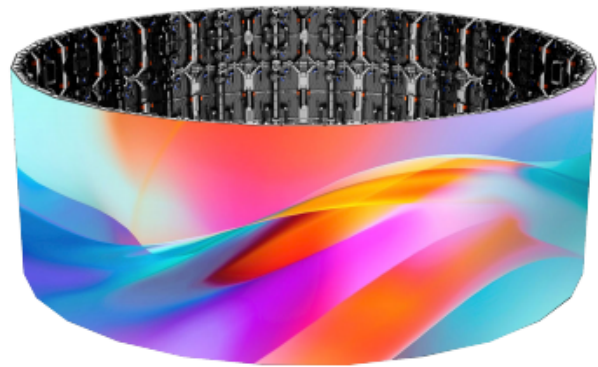

Annular assembly







Inner and outer arc assembly

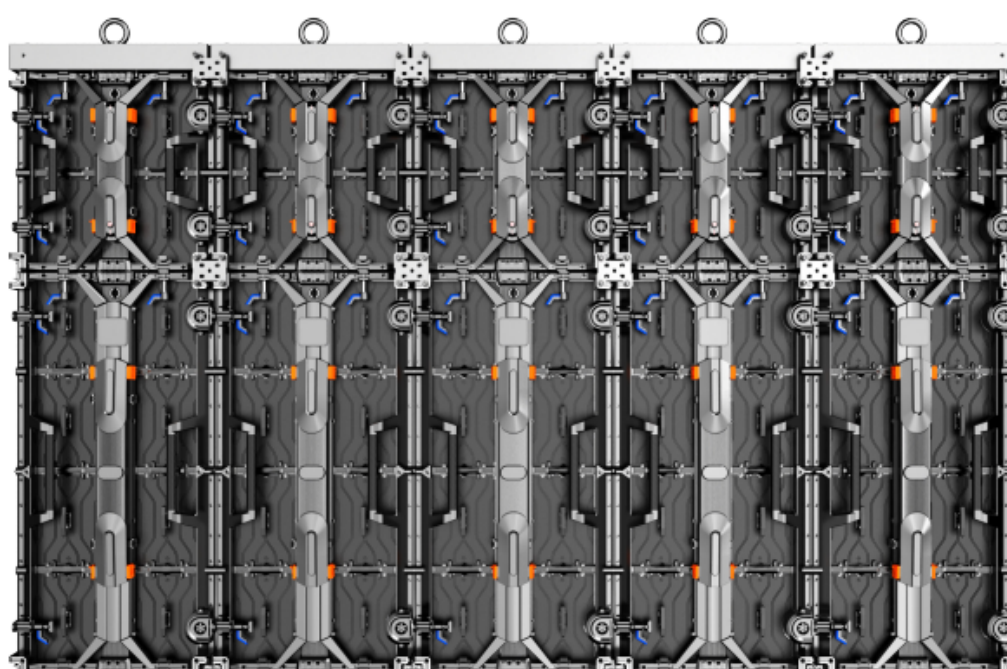

Hanging to install

Application scenarios

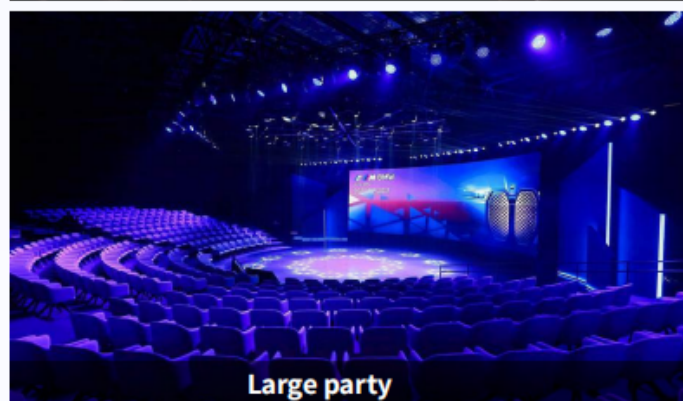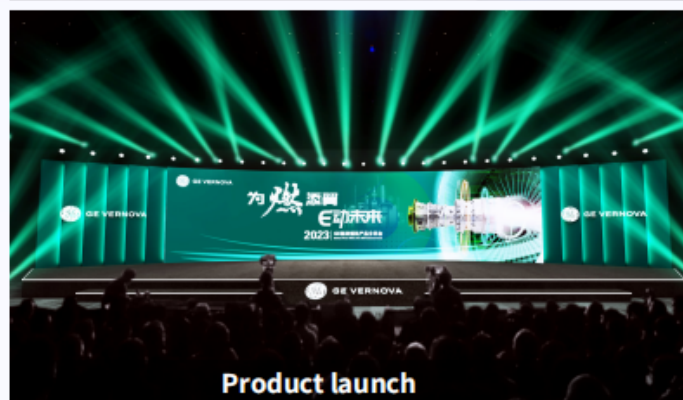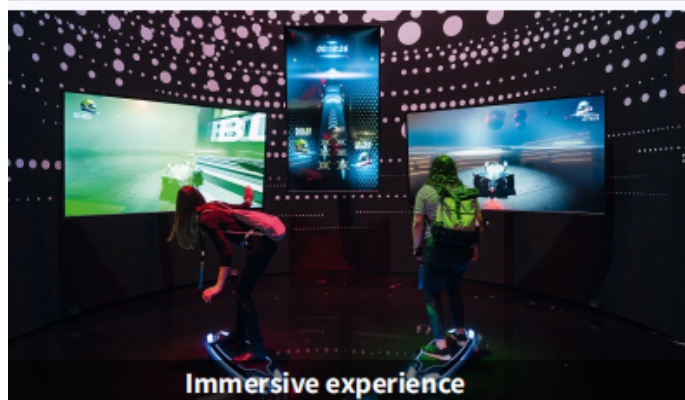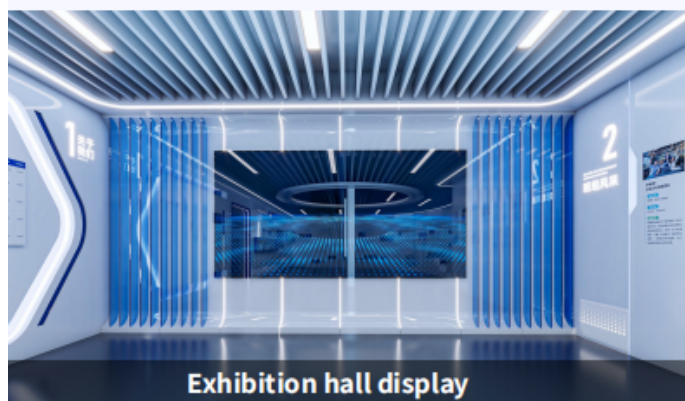

Specification parameter

product	500*500Y flat	500*500Y curved	500*1000Y flat	500*1000Y curved
specification	500 (W) * 500 (H) * 68 (D) mm		500 (W) * 1000 (H) * 68 (D) mm	
Weight does not contain modules/ power supplies	3KG	3.6KG	4.6KG	5.2KG
pitch	P1.953/P2.5/P2.604/P2.976/P3.91/P4.81			
Module size	250*250mm			
Material	Magnesium alloy			
Installation	Hoisting, base mounting, fixed mounting			
Use environment	Indoor/Outdoor			
color	Black/customizable			
radian	flat	-6°/-3°/0°/3°/6° curved	flat	-6°/-3°/0°/3°/6° curved
standard Accessories	2 sets of upper and lower locks, 2 sets of left and right locks	2 sets of curved locks	2 sets of upper and lower locks, 2 sets of left and right locks	2 sets of curved locks
	 2 power strips	 1.5 connecting plates	 1 key indicator	 Hanging beam (optional) - 0.5 m and 1 m hanging beam