



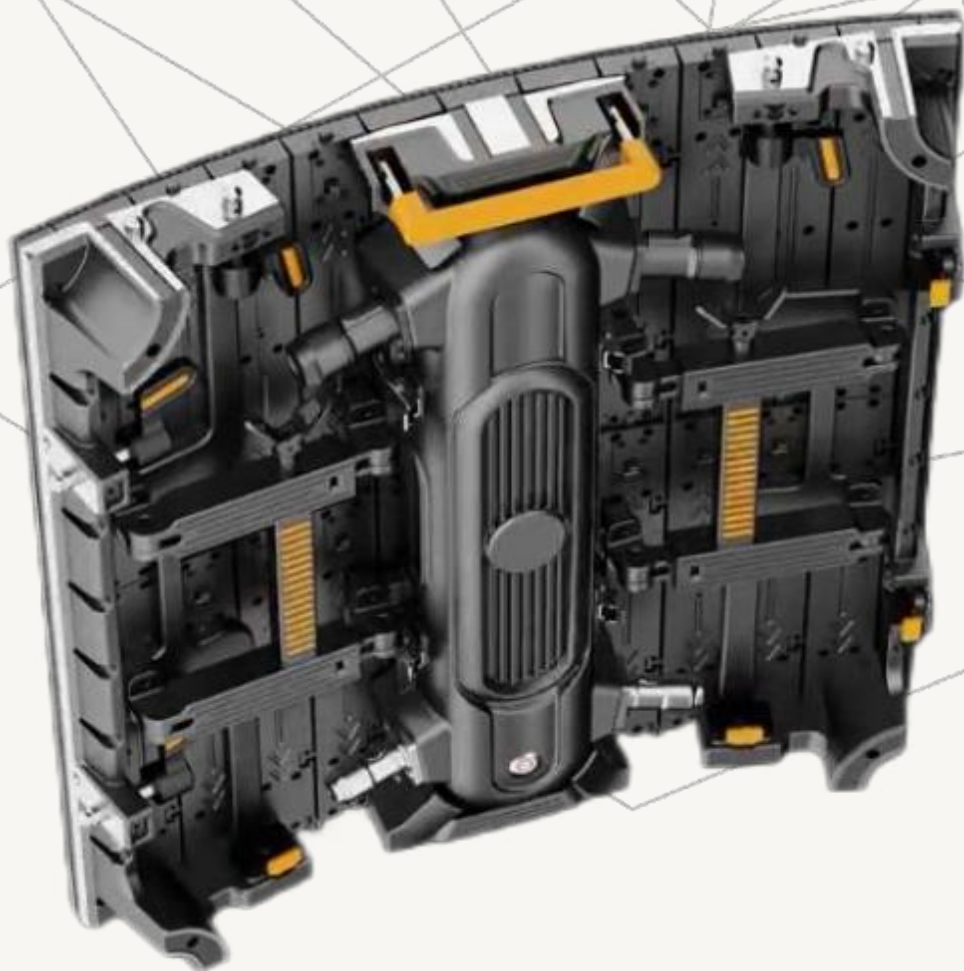

V1.1

500N Radian Series
-P 1.9 P2.6 P2.9 P3.9

500N radians series,
Permite alquilar pantallas LED
personalizado, que pueden
combinarse en formas tipo M,
tipo A, tipo Q, tipo S y otras
figuras cambiantes, haciendo
que la pantalla LED sea aún
más espectacular.

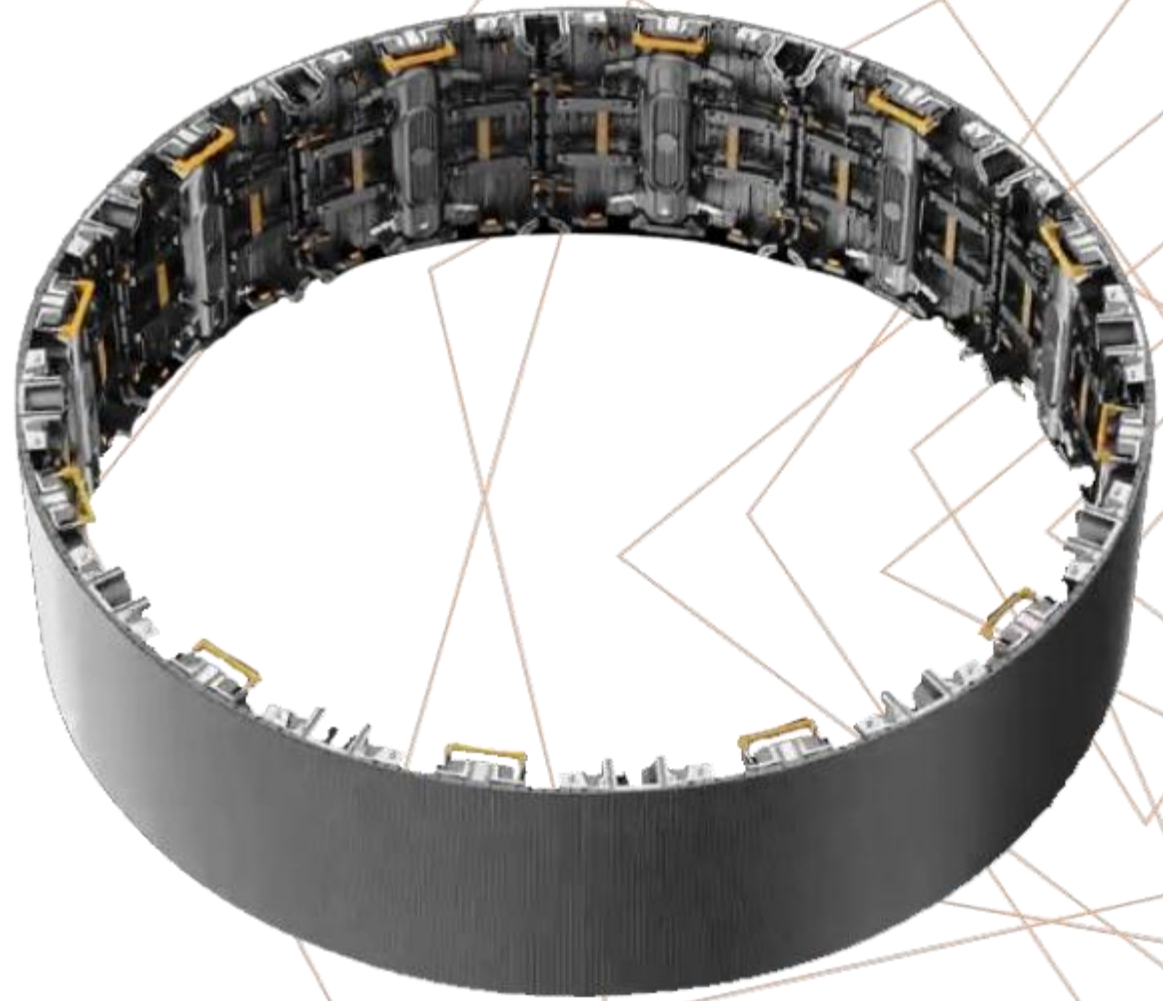



SÚPER LIGERA Y DELGADA

La cabina pesa solo 4,68 kg



ALTA PRECISIÓN


La precisión puede alcanzar los 0,05 mm



ARC SUPER ALTO


Una sola cabina con arco exterior de 45° y arco interior de 45°

ESTRUCTURA DE LA CABINA

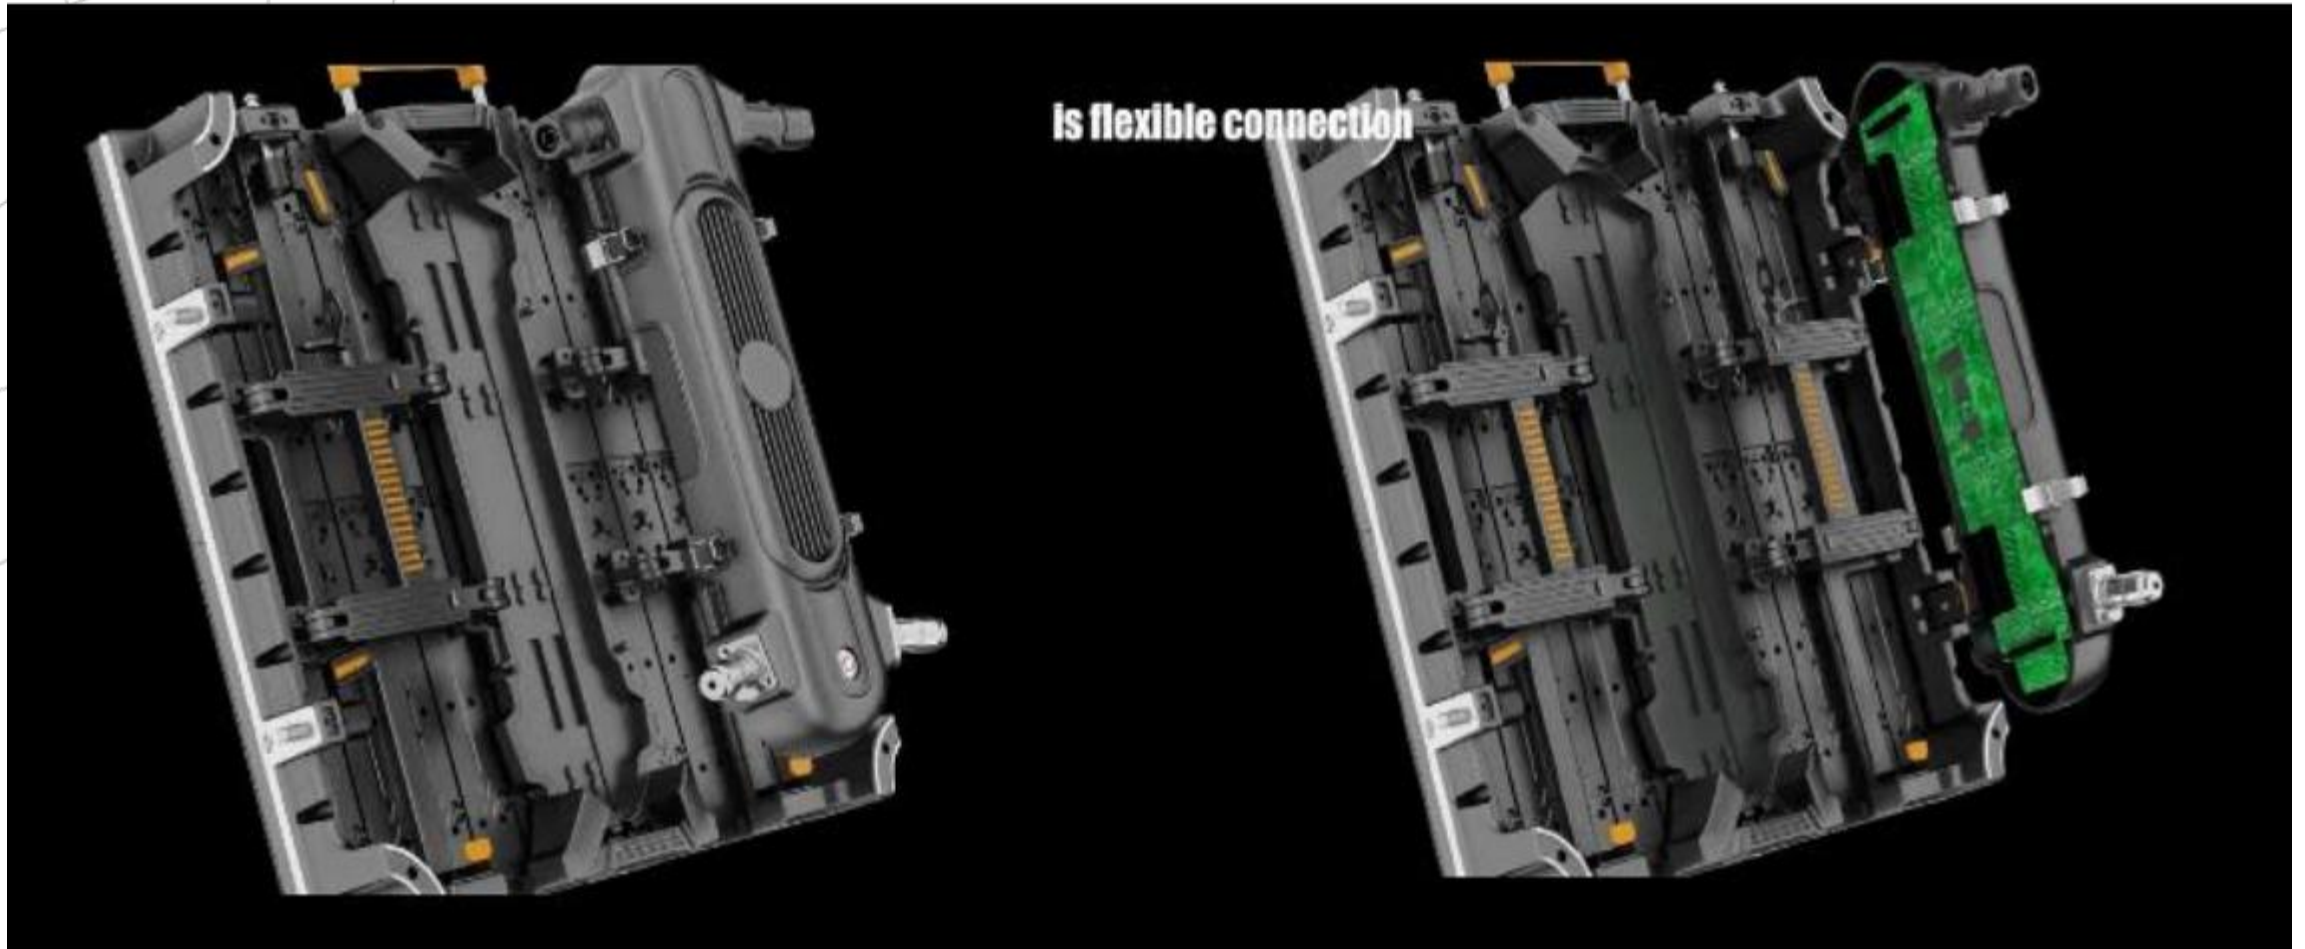


500N RADIANT SERIES APARIENCIA

$\pm 45^\circ$. Ángulo de curvatura

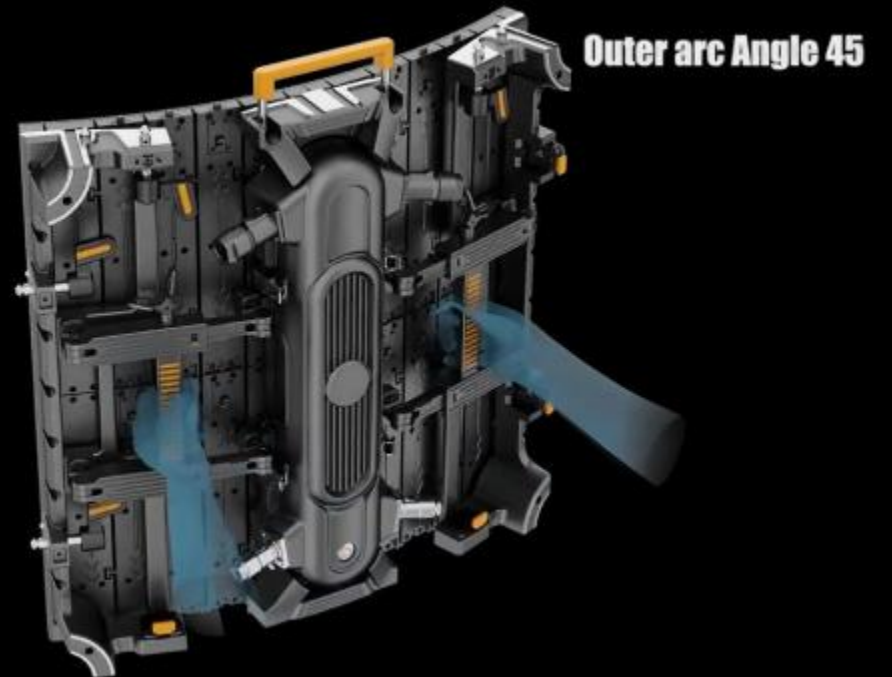


500N RADIANT SERIES APARIENCIA


**S-shaped Inner and outer
arc angles15**

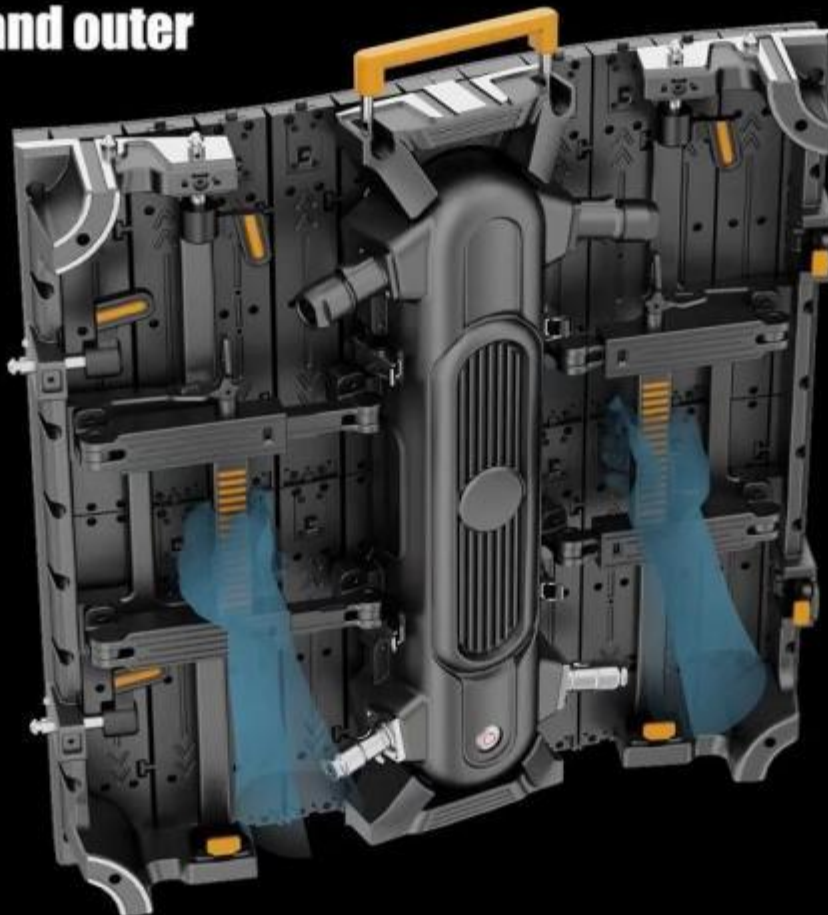


PANTALLA CILÍNDRICA

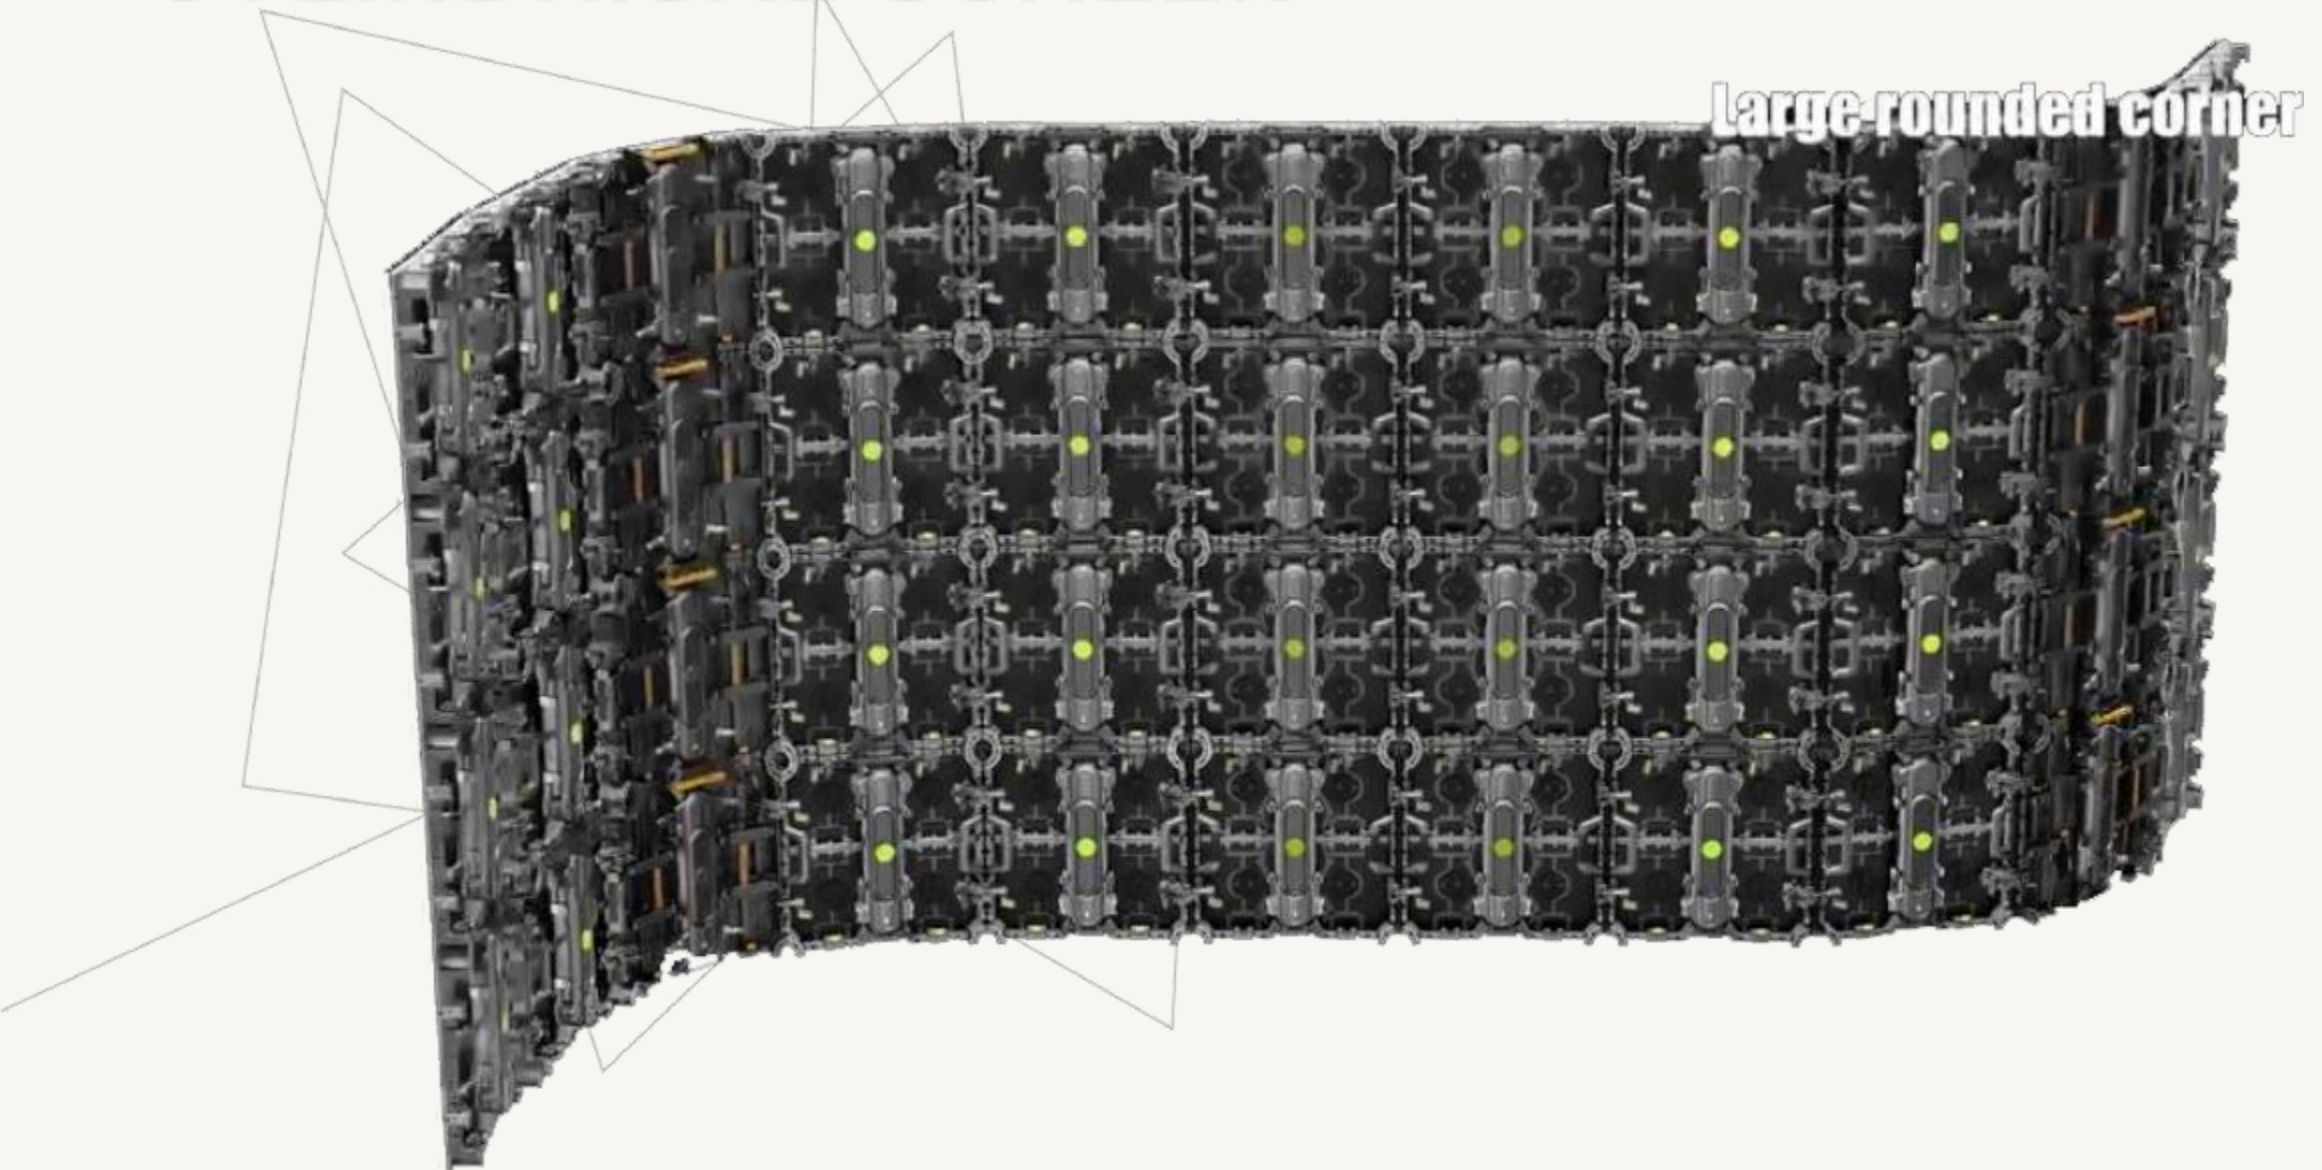

PANTALLA CILÍNDRICA

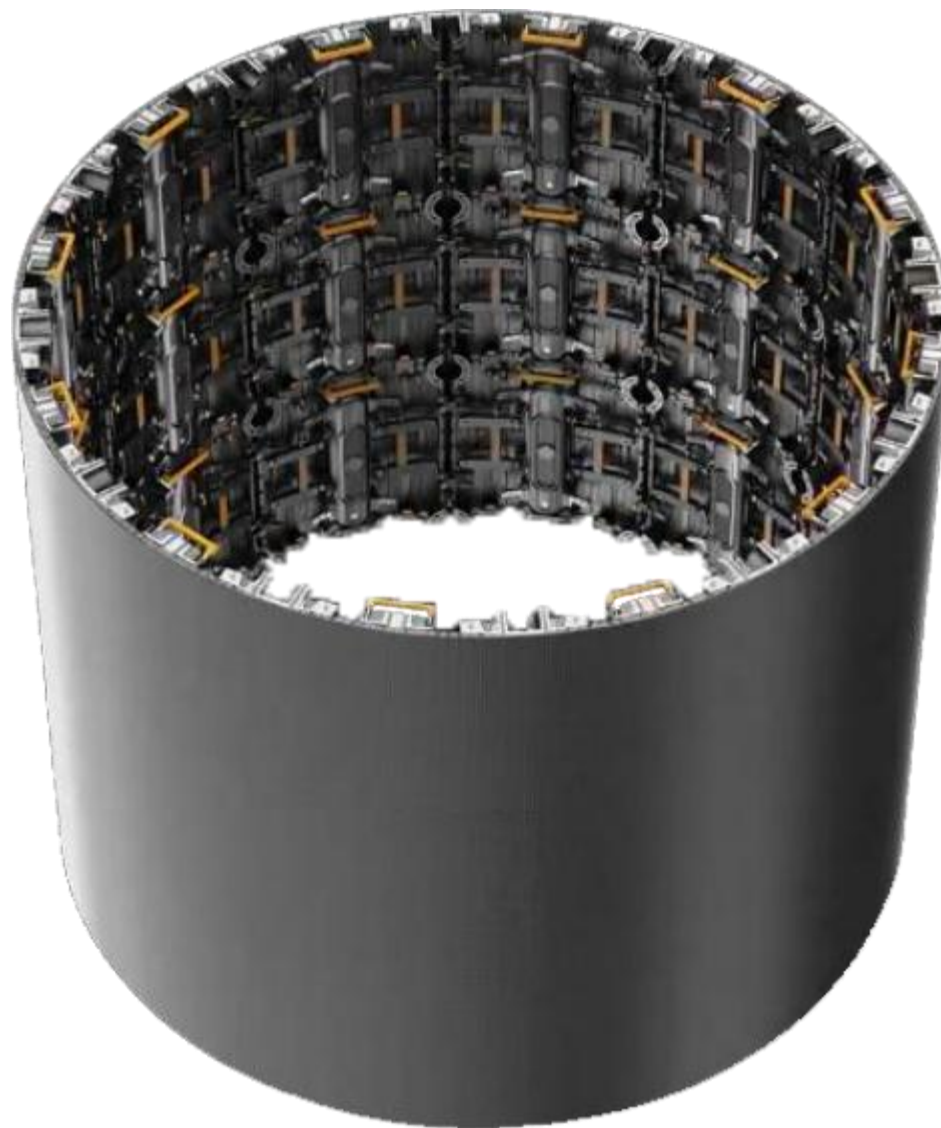

ESPECIFICACIONES DE LA CABINA

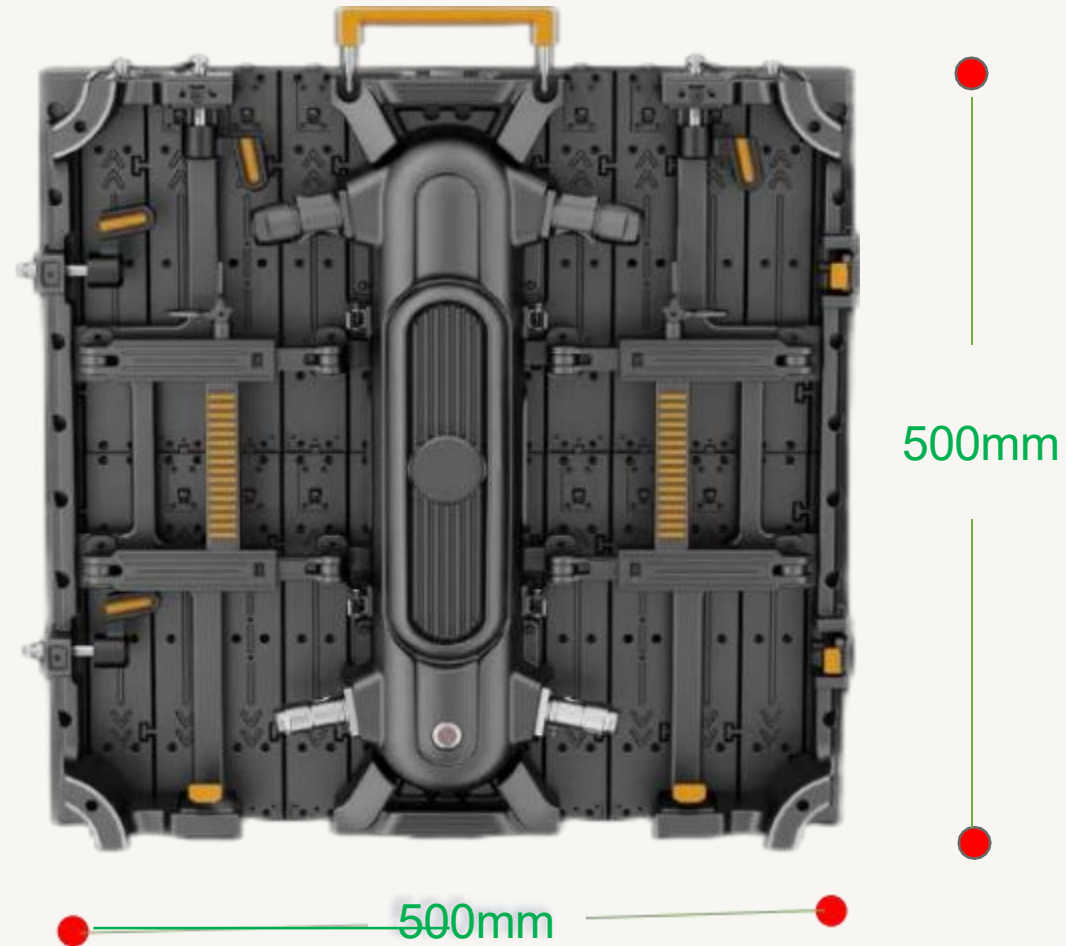

500 N Parameters					
Concepto	P1.9 (Indoor)	P2.6 (Indoor)	P2.9 (Indoor)	P3.91 (Indoor)	P3.91 (Outdoor)
Píxel	1.953mm	2.604mm	2.976mm	3.91mm	3.91mm
Tipo de LED	SMD1515	SMD1515	SMD2020	SMD2020	SMD1921
Resolución del modulo	128dots x 128dots	96dots x 96dots	84dots x 84dots	64dots x 64dots	64dots x 64dots
Escaneo	1/32scan	1/32scan	1/28scan	1/16scan	1/16scan
Píxeles del módulo	16,384dots	9,216dots	7,056dots	4,096dots	4,096dots
Tamaño del modulo	250 x 250	250 x 250	250 x 250	250 x 250	250 x 250
Tamaño de la cabina	500 x 500	500 x 500	500 x 500	500 x 500	500 x 500
Resolución de la cabina	258 x 258dots	192 x 192dots	168 x 168dots	128 x 128dots	128 x 128dots
Densidad de píxeles	282,144	147,456	112,896	65,536	65,536
Distancia mínima de visualización	≥1.9m	≥2.6m	≥2.9m	≥3.9m	≥3.9m
Brillo	600~800nits	600~800nits	600~800nits	600~800nits	≥4500nits
Grado de protección IP	IP43	IP43	IP43	IP43	IP65
Frecuencia de refresco	1920Hz~7,680Hz	1920Hz~7,680Hz	1920Hz~7,680Hz	1920Hz~7,680Hz	1920Hz~7,680Hz
Escala de grises	12~16bits	12~16bits	12~16bits	12~16bits	12~16bits
Ángulo de visión	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Consumo máximo de energía	800(W/m²)	800(W/m²)	800(W/m²)	800(W/m²)	800(W/m²)
Consumo promedio de energía	240(W/m²)	240(W/m²)	240(W/m²)	240(W/m²)	240(W/m²)
Voltaje de entrada	AC110V~AC220V	AC110V~AC220V	AC110V~AC220V	AC110V~AC220V	AC110V~AC220V
Temperatura de funcionamiento	-20℃~60℃	-20℃~60℃	-20℃~60℃	-20℃~60℃	-20℃~60℃
Humedad de funcionamiento	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
Material de cabina	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Peso de cabina	7.5kg/panel	7.5kg/panel	7.5kg/panel	7.5kg/panel	7.5kg/panel
Sistema operativo	Windows (Win7,Win8,etc.)	Windows (Win7,Win8,etc.)	Windows (Win7,Win10,etc.)	Windows (Win7,Win10,etc.)	Windows (Win7,Win10,etc.)
Compatibilidad con fuentes de señal	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc



Web: www.kmtekled.com

Mail: info@kmtekled.com sales@kmtekled.com

Tel: 0086-755-86619002

Fax: 0086-755-86619002

Mobile: 0086-13421820515

Address: Building 4, Nanggang second industrial Park, Sunshine Community, Xili Street, Nanshan District, Shenzhen, China(518108)

Skype: [kmtek.led](https://www.skype.com/user/kmtek.led)

Wechat: 0086-13421820515

What'sapp: 0086-13421820515

